

ROOTSBLOWER
GOLDENTECH

ROOTSBLOWER
GOLDENTECH



GOLDENTECH
ISO 9001


高豐機械有限公司

CAOFON MACHINERY INDUSTRY CO., LTD

公司：81164高雄市楠梓區荳蕉路1號
NO.1, Qiongjiao Rd., Nanzi Dist.,
Kaohsiung City 81164, Taiwan
TEL :+886 7 358-1570
FAX :+886 7 358-1573
Http://www.goldentech.com.tw
E-mail:gt-sales@umail.hinet.net



ISO 9001 認證通過

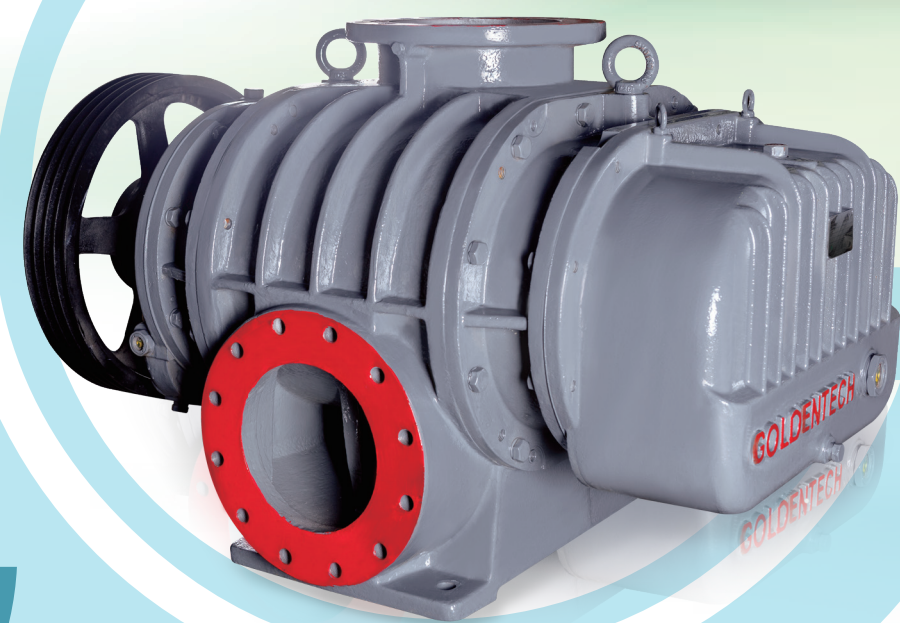

GOLDENTECH
ISO 9001

高豐機械有限公司

CAOFON MACHINERY INDUSTRY CO., LTD

Three lobes reduce vibration and noise!

高品質 / 低噪音三葉魯氏鼓風機

高豐三葉式鼓風機是魯氏系列的一種新產品。本公司以最新的CNC加工技術，製造精確的轉子，所以能提高性能、降低噪音及震動。

GOLDENTECH three lobes blowers are new series roots type blowers. By CNC machine, We made precise rotors to promote performance, lower noise and vibration.

特長

- ◆ 風量、壓力、真空度範圍廣。
 1. 口徑：40A~400A(1.5" ~16")
 2. 風量：0.5~360 m³/min
 3. 壓力：0~8000mmAq
 4. 真空度：-5000mmAq
- ◆ 風量穩定、壓力變化小。
- ◆ 排出氣體潔淨、氣體不含油污。
- ◆ 構造堅實簡單、保養維護容易。
- ◆ 軸承為機油潤滑、散熱佳、壽命長。

FEATURE

- ◆ Wide range for air volume、pressure and vacuum.
 1. Bore : 40A~400A(1.5" ~16")
 2. Capacity : 0.5~360 m³/min
 3. Pressure : 0~8000mmAq
 4. Vacuum : -5000mmAq
- ◆ Stable air flow and less pressure variation.
- ◆ Clean air not with oil moist.
- ◆ Construction simple and easy maintenance.
- ◆ Bearings are all lubricated by oil moist.

ROOTSBLOWER
GOLDENTECH



Why you choose GOLDENTECH Three-Lobe Roots Blower?


為何選擇高豐三葉魯式鼓風機？

■ 較低的能源損耗

三葉式的設計能減少逆流對轉子的壓力，相對地也減少能源的損耗。

■ LOWER ENERGY CONSUMPTION

Three-lobe design controls pressure of rotor to reduce energy consumption.

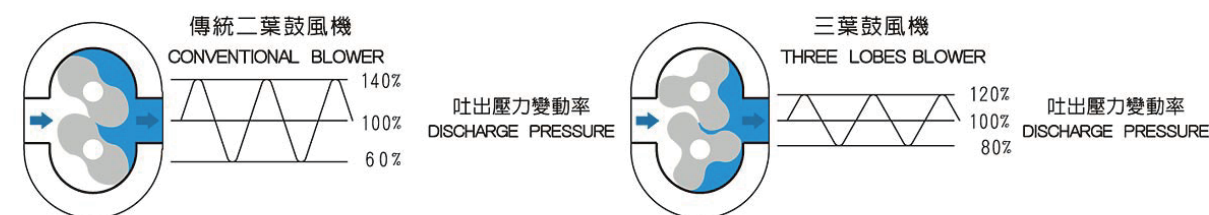

■ 較低的噪音

壓力脈衝是主要的噪音源，三葉式鼓風機能有效地降低噪音達5dB。

■ LOWER NOISE

Pressure pluses is the major noise source of blower. Three lobes' design can efficiently reduce noise by approximately 5dB.

■ 轉軸壽命延長


由於葉輪傳遞的震動減少，得以延長軸承壽命達20%。

■ LONGER BEARING LIFE

Less vibration transmitted through the lobe extend 20% longer bearing life. 20% longer bearing life.

傳統二葉式鼓風機壓力震幅大，造成震動及噪音，縮短軸承、齒輪及其他傳動元件的壽命。

Conventional blowers pressure pluses cause noise and vibration, shorten the life time of bearing, gear and other drive components.

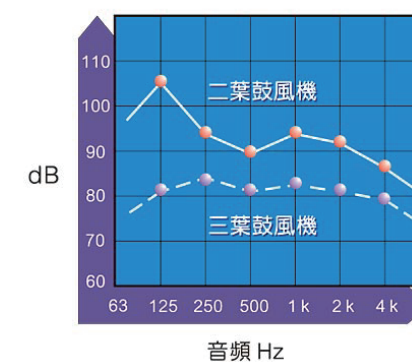



GT 型性能表 (壓送式)

GT TYPE PERFORMANCE TABLE (FOR PRESSURE)

GT TYPE PERFORMANCE TABLE (FOR PRESSURE)																	
TYPE	RPM	Qs(m³/min)				PRESSURE(mmAq)								La(kW)			
		1000		2000		3000		4000		5000		6000		7000		8000	
		Qs	La	Qs	La	Qs	La	Qs	La	Qs	La	Qs	La	Qs	La	Qs	La
GT-040	1650	0.61	0.19	0.57	0.37	0.55	0.53	0.52	0.67	0.50	0.81	0.48	0.94				
	1800	0.68	0.21	0.65	0.40	0.62	0.57	0.59	0.74	0.57	0.88	0.56	1.02				
	1950	0.76	0.23	0.72	0.43	0.70	0.62	0.67	0.80	0.65	0.96	0.63	1.11				
	2100	0.83	0.24	0.80	0.47	0.77	0.67	0.74	0.86	0.72	1.03	0.71	1.19				
	2250	0.91	0.26	0.87	0.50	0.84	0.72	0.82	0.92	0.80	1.11	0.78	1.28				
	2400	0.98	0.28	0.95	0.53	0.92	0.77	0.89	0.98	0.87	1.18	0.86	1.36				
	2550	1.06	0.30	1.02	0.57	0.99	0.81	0.97	1.04	0.95	1.25	0.93	1.45				
GT-050	850	1.00	0.41	0.80	0.80	0.65	1.16	0.51	1.51	0.38	1.84	0.29	2.15	0.21	2.45	0.15	2.74
	1000	1.32	0.48	1.12	0.94	0.97	1.37	0.83	1.77	0.71	2.16	0.62	2.53	0.54	2.88	0.48	3.22
	1150	1.65	0.56	1.45	1.08	1.30	1.57	1.16	2.04	1.03	2.49	0.94	2.91	0.86	3.32	0.80	3.71
	1300	1.97	0.63	1.77	1.22	1.62	1.78	1.48	2.31	1.36	2.81	1.27	3.29	1.19	3.75	1.13	4.19
	1450	2.30	0.70	2.10	1.36	1.95	1.98	1.81	2.57	1.68	3.13	1.59	3.67	1.51	4.18	1.45	4.67
	1600	2.62	0.77	2.42	1.50	2.27	2.19	2.13	2.84	2.01	3.46	1.92	4.05	1.84	4.61	1.78	5.16
	1750	2.95	0.85	2.75	1.64	2.60	2.39	2.46	3.11	2.33	3.78	2.24	4.43	2.16	5.05	2.10	5.64
GT-065	850	2.09	0.62	1.90	1.21	1.72	1.76	1.57	2.29	1.43	2.78	1.31	3.26	1.20	3.71	1.10	4.15
	1000	2.61	0.73	2.43	1.42	2.24	2.07	2.09	2.69	1.95	3.27	1.83	3.83	1.72	4.37	1.61	4.88
	1150	3.13	0.84	2.95	1.64	2.76	2.38	2.61	3.09	2.48	3.77	2.36	4.41	2.24	5.03	2.14	5.62
	1300	3.66	0.95	3.48	1.85	3.29	2.69	3.13	3.50	2.99	4.26	2.87	4.99	2.76	5.68	2.67	6.35
	1450	4.17	1.06	4.00	2.06	3.81	3.01	3.66	3.90	3.52	4.75	3.39	5.56	3.29	6.34	3.18	7.08
	1600	4.69	1.17	4.53	2.28	4.33	3.32	4.18	4.30	4.04	5.24	3.92	6.14	3.81	6.99	3.71	7.81
	1750	5.22	1.28	5.05	2.49	4.86	3.63	4.70	4.71	4.55	5.73	4.43	6.71	4.33	7.65	4.23	8.55
GT-080	850	3.27	1.12	2.90	2.14	2.56	3.08	2.25	3.94	1.97	4.73	1.71	5.47	1.49	6.15	1.29	6.79
	1000	4.18	1.32	3.81	2.52	3.47	3.62	3.16	4.63	2.88	5.57	2.62	6.44	2.40	7.24	2.20	7.99
	1150	5.09	1.51	4.71	2.90	4.38	4.16	4.07	5.33	3.79	6.40	3.53	7.40	3.31	8.33	3.11	9.19
	1300	6.00	1.71	5.62	3.27	5.29	4.71	4.98	6.02	4.70	7.24	4.44	8.37	4.22	9.41	4.02	10.39
	1450	6.91	1.91	6.53	3.65	6.20	5.25	5.89	6.72	5.61	8.07	5.35	9.33	5.13	10.50	4.93	11.58
	1600	7.82	2.11	7.44	4.03	7.11	5.79	6.80	7.41	6.51	8.91	6.26	10.30	6.04	11.58	5.84	12.78
	1750	8.73	2.30	8.35	4.41	8.02	6.33	7.71	8.11	7.42	9.75	7.17	11.26	6.94	12.67	6.74	13.98
GT-100	850	5.85	1.57	5.24	3.00	4.69	4.31	4.20	5.51	3.78	6.63	3.39	7.66	3.06	8.62	2.77	9.51
	1000	7.13	1.84	6.52	3.53	5.96	5.07	5.47	6.49	5.05	7.80	4.67	9.01	4.34	10.14	4.04	11.19
	1150	8.40	2.12	7.79	4.05	7.24	5.83	6.74	7.46	6.32	8.97	5.94	10.36	5.61	11.66	5.31	12.86
	1300	9.67	2.40	9.06	4.58	8.51	6.59	8.02	8.43	7.59	10.14	7.21	11.71	6.88	13.18	6.58	14.54
	1450	10.94	2.67	10.33	5.11	9.78	7.35	9.29	9.41	8.87	11.31	8.48	13.06	8.15	14.70	7.86	16.22
	1600	12.22	2.95	11.61	5.64	11.05	8.11	10.56	10.38	10.14	12.47	9.76	14.42	9.43	16.22	9.13	17.90
	1750	13.49	3.23	12.88	6.17	12.33	8.87	11.84	11.35	11.41	13.64	11.03	15.77	10.70	17.74	10.40	19.57
GT-125S	750	8.21	2.05	7.51	3.91	6.87	5.62	6.29	7.20	5.78	8.66	5.31	10.01	4.87	11.26	4.51	12.42
	900	10.12	2.46	9.42	4.70	8.78	6.75	8.20	8.64	7.69	10.39	7.22	12.01	6.78	13.51	6.41	14.91
	1050	12.03	2.86	11.33	5.48	10.69	7.87	10.10	10.08	9.60	12.12	9.12	14.01	8.69	15.76	8.32	17.39
	1200	13.93	3.27	13.24	6.26	12.60	9.00	12.01	11.52	11.50	13.85	11.03	16.01	10.60	18.01	10.23	19.88
	1350	15.84	3.68	15.14	7.04	14.51	10.12	13.92	12.96	13.41	15.58	12.94	18.01	12.51	20.27	12.14	22.36
	1500	17.75	4.09	17.05	7.83	16.42	11.25	15.83	14.40	15.32	17.31	14.85	20.01	14.42	22.52	14.05	24.85
	1650	19.66	4.50	18.96	8.61	18.33	12.37	17.74	15.84	17.23	19.04	16.76	22.01	16.33	24.77	15.96	27.33



GT 型性能表 (壓送式)

GT TYPE PERFORMANCE TABLE (FOR PRESSURE)

GT TYPE PERFORMANCE TABLE (FOR PRESSURE)																	
TYPE	RPM	Qs(m³/min)				PRESSURE(mmAq)								La(kW)			
		1000		2000		3000		4000		5000		6000		7000		8000	
		Qs	La	Qs	La	Qs	La	Qs	La	Qs	La	Qs	La	Qs	La	Qs	La
GT-125	750	10.40	2.59	9.51	4.96	8.70	7.13	7.96	9.12	7.32	10.97	6.72	12.67	6.17	14.26	5.71	15.74
	900	12.82	3.11	11.93	5.95	11.12	8.55	10.38	10.95	9.74	13.16	9.14	15.21	8.59	17.11	8.12	18.89
	1050	15.23	3.63	14.35	6.94	13.54	9.98	12.80	12.77	12.15	15.35	11.56	17.74	11.01	19.97	10.54	22.04
	1200	17.65	4.15	16.76	7.93	15.96	11.40	15.22	14.59	14.57	17.55	13.98	20.28	13.43	22.82	12.96	25.18
	1350	20.07	4.66	19.18	8.92	18.38	12.83	17.63	16.42	16.99	19.74	16.39	22.81	15.85	25.67	15.38	28.33
	1500	22.49	5.18	21.60	9.91	20.79	14.25	20.05	18.24	19.41	21.93	18.81	25.35	18.26	28.52	17.80	31.48
	1650	24.90	5.70	24.02	10.90	23.21	15.68	22.47	20.07	21.83	24.13	21.23	27.88	20.68	31.38	20.21	34.63
GT-150	750	13.45	3.34	12.74	6.39	12.10	9.19	11.52	11.76	10.97	14.14	10.50	16.34	10.10	18.39	9.71	20.30
	900	16.57	4.01	15.86	7.67	15.22	11.03	14.63	14.11	14.09	16.97	13.61	19.61	13.22	22.07	12.82	24.36
	1050	19.68	4.68	18.98	8.95	18.33	12.86	17.75	16.47	17.21	19.80	16.73	22.88	16.34	25.75	15.94	28.41
	1200	22.80	5.35	22.10	10.23	21.45	14.70	20.87	18.82	20.33	22.62	19.85	26.15	19.46	29.42	19.06	32.47
	1350	25.92	6.02	25.21	11.50	24.57	16.54	23.99	21.17	23.45	25.45	22.97	29.42	22.57	33.10	22.18	36.53
	1500	29.04	6.68	28.33	12.78	27.69	18.38	27.10	23.52	26.56	28.28	26.09	32.69	25.69	36.78	25.30	40.59
	1650	32.16	7.35	31.45	14.06	30.80	20.21	30.22	25.88	29.68	31.11	29.20	35.96	28.81	40.46	28.41	44.65
GT-200	600	17.18	4.84	16.11	9.27	15.19	13.32	14.35	17.06	13.67	20.51	13.06	23.71	12.52	26.68	12.10	29.45
	750	22.91	6.05	21.84	11.58	20.92	16.65	20.08	21.32	19.39	25.64	18.78	29.64	18.25	33.36	17.83	36.82
	900	28.63	7.27	27.56	13.90	26.65	19.98	25.81	25.59	25.12	30.77	24.51	35.57	23.98	40.03	23.56	44.18
	1050	34.36	8.48	33.29	16.22	32.37	23.32	31.54	29.85	30.85	35.89	30.24	41.49	29.70	46.70	29.28	51.55
	1200	40.09	9.69	39.02	18.53	38.10	26.65	37.26	34.12	36.57	41.02	35.96	47.42	35.43	53.37	35.01	58.91
	1350	45.81	10.90	44.74	20.85	43.83	29.98	42.99	38.38	42.30	46.15	41.69	53.35	41.16	60.04	40.74	66.27
	1500	51.54	12.11	50.47	23.17	49.56	33.31	48.72	42.65	48.03	51.28	47.42	59.28	46.88	66.71	46.46	73.64
GT-200A	600	28.00	7.40	26.48	14.16	25.14	20.35	23.91	26.06	22.81	31.34	21.81	36.23	20.94	40.77	20.18	45.00
	750	36.75	9.25	35.23	17.70	33.89	25.44	32.66	32.58	31.56	39.17	30.56	45.28	29.69	50.96	28.93	56.25
	900	45.50	11.10	43.98	21.24	42.64	30.53	41.41	39.09	40.30	47.01	39.31	54.34	38.44	61.15	37.68	67.50
	1050	54.24	12.95	52.73	24.77	51.39	35.62	50.16	45.61	49.05	54.84	48.06	63.39	47.19	71.34	46.43	78.75
	1200	62.99	14.80	61.48	28.31	60.14	40.71	58.91	52.12	57.80	62.67	56.81	72.45	55.94	81.54	55.18	90.00
	1350	71.74	16.65	70.23	31.85	68.88	45.80	67.66	58.64	66.55	70.51	65.56	81.51	64.69	91.73		



GT 型性能表 (壓送式)

GT TYPE PERFORMANCE TABLE (FOR PRESSURE)

GT TYPE PERFORMANCE TABLE (FOR PRESSURE)																	
TYPE	RPM	Qs(m³/min)				PRESSURE(mmAq)								La(kW)			
		1000		2000		3000		4000		5000		6000		7000		8000	
		Qs	La	Qs	La	Qs	La	Qs	La	Qs	La	Qs	La	Qs	La	Qs	La
GT-300	600	59.53	14.44	56.04	25.88	54.25	37.23	52.56	47.70	50.99	58.83	49.75	68.88	48.07	79.49	47.17	88.83
	750	76.37	18.06	72.89	32.35	71.09	46.54	69.41	59.63	67.84	73.53	66.60	86.10	64.92	99.36	64.02	111.0
	900	93.22	21.67	89.74	38.82	87.94	55.85	86.26	71.55	84.68	88.24	83.45	103.3	81.76	119.2	80.86	133.3
	1050	110.1	25.28	106.6	45.29	104.8	65.16	103.1	83.48	101.5	102.9	100.29	120.5	98.61	139.1	97.71	155.5
	1200	126.9	28.89	123.4	51.76	121.6	74.46	119.9	95.41	118.4	117.7	117.1	137.8	115.5	159.0	114.6	177.7
	1350	143.8	32.50	140.3	58.23	138.5	83.77	136.8	107.3	135.2	132.4	134.0	155.0	132.3	178.8	131.4	199.9
	1500	160.6	36.11	157.1	64.70	155.3	93.08	153.6	119.3	152.1	147.1	150.8	172.2	149.2	198.7	148.3	222.1
	GT-300A	600	89.2	21.07	85.8	37.30	83.2	53.64	80.8	71.4	78.8	87.0	76.9	103.1	75.2	119.0	73.2
700		105.8	24.58	102.4	43.52	99.7	62.58	97.4	83.3	95.4	101.5	93.4	120.3	91.8	138.9	89.8	159.3
800		122.4	28.10	118.9	49.74	116.3	71.52	114.0	95.2	112.0	116.0	110.0	137.5	108.3	158.7	106.3	182.1
900		138.9	31.61	135.5	55.95	132.8	80.46	130.5	107.1	128.5	130.5	126.5	154.7	124.9	178.6	122.9	204.8
1000		155.5	35.12	152.1	62.17	149.4	89.39	147.1	119.0	145.1	145.0	143.1	171.9	141.5	198.4	139.5	227.6
1100		172.1	38.63	168.6	68.39	166.0	98.33	163.7	130.9	161.7	159.5	159.7	189.1	158.0	218.2	156.0	250.3
1200		188.6	42.15	185.2	74.60	182.5	107.3	180.2	142.8	178.2	174.0	176.2	206.3	174.6	238.1	172.6	273.1
GT-350A		600	139.7	32.31	134.4	58.00	130.3	83.48	126.5	109.6	123.1	134.1	120.3	160.3	117.4	182.7	114.6
	700	165.5	37.70	160.2	67.67	156.1	97.39	152.2	127.9	148.9	156.4	146.0	187.1	143.2	213.2	140.4	247.7
	800	191.2	43.08	186.0	77.33	181.8	111.3	178.0	146.2	174.6	178.8	171.8	213.8	169.0	243.7	166.1	283.1
	900	217.0	48.47	211.7	87.00	207.6	125.2	203.7	164.5	200.4	201.1	197.5	240.5	194.7	274.1	191.9	318.5
	1000	242.7	53.85	237.5	96.67	233.3	139.1	229.5	182.7	226.1	223.4	223.3	267.2	220.5	304.6	217.6	353.9
	1100	268.5	59.24	263.2	106.3	259.1	153.0	255.2	201.0	251.9	245.8	249.1	294.0	246.2	335.0	243.4	389.2
	1200	294.3	64.62	289.0	116.0	284.9	167.0	281.0	219.3	277.6	268.1	274.8	320.7	272.0	365.5	269.1	424.6
	GT-400	600	238.7	53.28	232.6	95.65	227.7	137.7	223.5	180.8	219.8	221.1	216.3	264.4	213.4	301.4	210.9
650		259.9	57.73	253.9	103.6	249.0	149.1	244.7	195.9	241.0	239.5	237.5	286.5	234.7	326.5	232.1	379.3
700		281.2	62.17	275.1	111.6	270.2	160.6	266.0	210.9	262.2	257.9	258.7	308.5	255.9	351.6	253.4	408.5
750		302.4	66.61	296.3	119.6	291.5	172.1	287.2	226.0	283.5	276.4	280.0	330.5	277.1	376.7	274.6	437.7
800		323.6	71.05	317.6	127.5	312.7	183.6	308.4	241.1	304.7	294.8	301.2	352.6	298.4	401.8	295.8	466.8
850		344.9	75.49	338.8	135.5	333.9	195.0	329.7	256.1	325.9	313.2	322.5	374.6	319.6	426.9	317.1	496.0
900		366.1	79.93	360.0	143.5	355.2	206.5	350.9	271.2	347.2	331.6	343.7	396.7	340.9	452.0	338.3	525.2



GTV 型性能表 (真空用)

GTV TYPE PERFORMANCE TABLE (FOR VACUUM)

GTV TYPE PERFORMANCE TABLE (FOR VACUUM)																	
TYPE	RPM	Qs(m³/min)				PRESSURE(mmAq)								La(kW)			
		-1000		-2000		-2500		-3000		-3500		-4000		-4500		-5000	
		Qs	La	Qs	La	Qs	La	Qs	La	Qs	La	Qs	La	Qs	La	Qs	La
GTV-040	1650	0.61	0.19	0.58	0.37	0.55	0.44	0.52	0.50	0.51	0.56	0.48	0.62				
	1800	0.68	0.21	0.66	0.40	0.63	0.48	0.59	0.55	0.58	0.61	0.56	0.67				
	1950	0.76	0.23	0.73	0.43	0.70	0.51	0.67	0.59	0.66	0.67	0.63	0.73				
	2100	0.83	0.24	0.81	0.47	0.78	0.55	0.74	0.64	0.73	0.72	0.71	0.79				
	2250	0.91	0.26	0.88	0.50	0.85	0.59	0.82	0.69	0.81	0.77	0.78	0.84				
	2400	0.98	0.28	0.96	0.53	0.93	0.63	0.89	0.73	0.88	0.82	0.86	0.90				
	2550	1.06	0.30	1.03	0.57	1.00	0.67	0.97	0.78	0.96	0.87	0.93	0.95				
	GTV-050	850	1.00	0.41	0.83	0.80	0.73	0.98	0.62	1.16	0.52	1.34	0.37	1.51	0.27	1.67	0.14
1000		1.32	0.48	1.15	0.94	1.05	1.16	0.94	1.37	0.84	1.57	0.69	1.77	0.60	1.97	0.47	2.16
1150		1.65	0.56	1.48	1.08	1.38	1.33	1.27	1.57	1.17	1.81	1.02	2.04	0.92	2.27	0.79	2.49
1300		1.97	0.63	1.80	1.22	1.70	1.50	1.59	1.78	1.49	2.05	1.34	2.31	1.25	2.56	1.12	2.81
1450		2.30	0.70	2.13	1.36	2.03	1.68	1.92	1.98	1.82	2.28	1.67	2.57	1.57	2.86	1.44	3.13
1600		2.62	0.77	2.45	1.50	2.35	1.85	2.24	2.19	2.14	2.52	1.99	2.84	1.90	3.15	1.77	3.46
1750		2.95	0.85	2.78	1.64	2.68	2.02	2.57	2.39	2.47	2.75	2.32	3.11	2.22	3.45	2.09	3.78
GTV-065		850	2.11	0.66	1.93	1.28	1.82	1.58	1.69	1.87	1.57	2.15	1.42	2.42	1.27	2.69	1.10
	1000	2.63	0.78	2.46	1.51	2.34	1.86	2.22	2.20	2.09	2.53	1.94	2.85	1.79	3.16	1.62	3.47
	1150	3.15	0.89	2.98	1.73	2.87	2.14	2.74	2.53	2.61	2.91	2.47	3.28	2.31	3.64	2.14	3.99
	1300	3.67	1.01	3.50	1.96	3.39	2.41	3.26	2.86	3.13	3.29	2.99	3.71	2.84	4.11	2.66	4.51
	1450	4.20	1.13	4.02	2.19	3.91	2.69	3.78	3.19	3.65	3.67	3.51	4.13	3.36	4.59	3.18	5.03
	1600	4.72	1.24	4.54	2.41	4.43	2.97	4.30	3.52	4.18	4.05	4.03	4.56	3.88	5.06	3.71	5.55
	1750	5.24	1.36	5.06	2.64	4.95	3.25	4.83	3.85	4.70	4.42	4.55	4.99	4.40	5.54	4.23	6.08
	GTV-080	850	3.27	1.12	2.85	2.14	2.63	2.62	2.39	3.08	2.12	3.52	1.85	3.94	1.55	4.34	1.24
1000		4.18	1.32	3.76	2.52	3.54	3.08	3.30	3.62	3.03	4.14	2.76	4.63	2.46	5.11	2.15	5.57
1150		5.09	1.51	4.67	2.90	4.45	3.54	4.21	4.16	3.94	4.76	3.67	5.33	3.37	5.88	3.06	6.40
1300		6.00	1.71	5.58	3.27	5.36	4.01	5.11	4.71	4.85	5.38	4.58	6.02	4.28	6.64	3.97	7.24
1450		6.91	1.91	6.49	3.65	6.27	4.47	6.02	5.25	5.76	6.00	5.48	6.72	5.19	7.41	4.88	8.08
1600		7.82	2.11	7.40	4.03	7.18	4.93	6.93	5.79	6.67	6.62	6.39	7.41	6.10	8.18	5.79	8.91
1750		8.73	2.30	8.31	4.41	8.08	5.39	7.84	6.33	7.58	7.24	7.30	8.11	7.01	8.94	6.70	9.75
GTV-100		850	5.85	1.57	5.24	3.00	4.90	3.67	4.52	4.31	4.13	4.92	3.71	5.51	3.25	6.08	2.77
	1000	7.12	1.84	6.52	3.53	6.17	4.31	5.79	5.07	5.40	5.79	4.98	6.49	4.52	7.15	4.04	7.80
	1150	8.39	2.12	7.79	4.05	7.44	4.96	7.07	5.83	6.68	6.66	6.25	7.46	5.79	8.23	5.31	8.97
	1300	9.66	2.40	9.06	4.58	8.71	5.61	8.34	6.59	7.95	7.53	7.53	8.43	7.07	9.30	6.58	10.14
	1450	10.94	2.67	10.33	5.11	9.99	6.25	9.61	7.35	9.22	8.40	8.80	9.41	8.34	10.37	7.86	11.31
	1600	12.21	2.95	11.61	5.64	11.26	6.90	10.88	8.11	10.49	9.27	10.07	10.38	9.61	11.45	9.13	12.47
	1750	13.48	3.23	12.88	6.17	12.53	7.55	12.16	8.87	11.77	10.14	11.34	11.35	10.88	12.52	10.40	13.64
	GTV-125S	750	8.21	2.05	7.42	3.91	7.00	4.79	6.54	5.63	6.07	6.43	5.59	7.20	5.05	7.94	4.51
900		10.12	2.46	9.33	4.70	8.91	5.75	8.45	6.75	7.98	7.72	7.50	8.64	6.96	9.53	6.41	10.39
1050		12.03	2.86	11.24	5.48	10.82	6.70	10.36	7.88	9.89	9.00	9.40	10.08	8.87	11.12	8.32	12.12
1200		13.93	3.27	13.15	6.26	12.73	7.66	12.27	9.00	11.80	10.29	11.31	11.52	10.78	12.71	10.23	13.85
1350		15.84	3.68	15.05	7.04	14.63	8.62	14.18	10.13	13.71	11.57	13.22	12.96	12.69	14.30	12.14	15.59
1500		17.75	4.09	16.96	7.83	16.54	9.58	16.09	11.25	15.61	12.86	15.13	14.40	14.60	15.		



GTV 型性能表 (真空用)

GTV TYPE PERFORMANCE TABLE (FOR VACUUM)

GTV TYPE PERFORMANCE TABLE (FOR VACUUM)																	
TYPE	RPM	Qs(m ³ /min)						PRESSURE(mmAq)						La(kW)			
		-1000		-2000		-2500		-3000		-3500		-4000		-4500		-5000	
		Qs	La	Qs	La	Qs	La	Qs	La	Qs	La	Qs	La	Qs	La	Qs	La
GTV-125	750	10.40	2.59	9.40	4.96	8.87	6.06	8.29	7.13	7.69	8.14	7.08	9.12	6.40	10.06	5.71	10.97
	900	12.82	3.11	11.82	5.95	11.28	7.28	10.70	8.55	10.11	9.77	9.49	10.95	8.82	12.07	8.12	13.16
	1050	15.23	3.63	14.23	6.94	13.70	8.49	13.12	9.98	12.52	11.40	11.91	12.77	11.24	14.09	10.54	15.35
	1200	17.65	4.15	16.65	7.93	16.12	9.70	15.54	11.40	14.94	13.03	14.33	14.59	13.65	16.10	12.96	17.55
	1350	20.07	4.66	19.07	8.92	18.54	10.92	17.96	12.83	17.36	14.66	16.75	16.42	16.07	18.11	15.38	19.74
	1500	22.49	5.18	21.49	9.91	20.96	12.13	20.38	14.25	19.78	16.29	19.17	18.24	18.49	20.12	17.80	21.93
	1650	24.90	5.70	23.91	10.90	23.37	13.34	22.79	15.68	22.20	17.92	21.58	20.07	20.91	22.14	20.21	24.13
GTV-150	750	13.45	3.34	12.68	6.39	12.26	7.82	11.81	9.19	11.31	10.50	10.79	11.76	10.23	12.97	9.64	14.14
	900	16.57	4.01	15.80	7.67	15.38	9.38	14.92	11.03	14.43	12.60	13.91	14.11	13.34	15.57	12.76	16.97
	1050	19.68	4.68	18.92	8.95	18.50	10.95	18.04	12.86	17.54	14.70	17.02	16.47	16.46	18.16	15.88	19.80
	1200	22.80	5.35	22.03	10.23	21.62	12.51	21.16	14.70	20.66	16.80	20.14	18.82	19.58	20.76	19.00	22.62
	1350	25.92	6.02	25.15	11.50	24.74	14.07	24.28	16.54	23.78	18.90	23.26	21.17	22.70	23.35	22.12	25.45
	1500	29.04	6.68	28.27	12.78	27.85	15.64	27.40	18.38	26.90	21.00	26.38	23.52	25.82	25.95	25.23	28.28
	1650	32.16	7.35	31.39	14.06	30.97	17.20	30.51	20.21	30.01	23.10	29.50	25.88	28.93	28.54	28.35	31.11
GTV-200	600	17.18	4.84	16.15	9.27	15.58	11.34	15.00	13.32	14.35	15.23	13.63	17.06	12.90	18.82	12.10	20.51
	750	22.91	6.05	21.88	11.58	21.30	14.17	20.73	16.65	20.08	19.04	19.36	21.32	18.63	23.52	17.83	25.64
	900	28.63	7.27	27.60	13.90	27.03	17.01	26.46	19.98	25.81	22.84	25.08	25.59	24.36	28.23	23.56	30.77
	1050	34.36	8.48	33.33	16.22	32.76	19.84	32.18	23.32	31.54	26.65	30.81	29.85	30.08	32.93	29.28	35.89
	1200	40.09	9.69	39.06	18.53	38.48	22.67	37.91	26.65	37.26	30.46	36.54	34.12	35.81	37.64	35.01	41.02
	1350	45.81	10.90	44.78	20.85	44.21	25.51	43.64	29.98	42.99	34.26	42.26	38.38	41.54	42.34	40.74	46.15
	1500	51.54	12.11	50.51	23.17	49.94	28.34	49.36	33.31	48.72	38.07	47.99	42.65	47.26	47.05	46.46	51.28
GTV-200A	600	28.00	7.40	26.48	14.16	25.61	17.32	24.67	20.35	23.68	23.27	22.57	26.06	21.41	28.75	20.18	31.34
	750	36.75	9.25	35.23	17.70	34.35	21.65	33.42	25.44	32.43	29.08	31.32	32.58	30.16	35.94	28.93	39.17
	900	45.50	11.10	43.98	21.24	43.10	25.98	42.17	30.53	41.18	34.90	40.07	39.09	38.90	43.13	37.68	47.01
	1050	54.24	12.95	52.73	24.77	51.85	30.31	50.92	35.62	49.93	40.72	48.82	45.61	47.65	50.31	46.43	54.84
	1200	62.99	14.80	61.48	28.31	60.60	34.64	59.67	40.71	58.68	46.53	57.57	52.12	56.40	57.50	55.18	62.67
	1350	71.74	16.65	70.23	31.85	69.35	38.97	68.42	45.80	67.43	52.35	66.32	58.64	65.15	64.69	63.93	70.51
	1500	80.5	18.50	79.0	35.39	78.1	43.30	77.2	50.89	76.2	58.16	75.1	65.16	73.90	71.88	72.68	78.34
GTV-250	600	28.00	7.40	26.48	14.16	25.61	17.32	24.67	20.35	23.68	23.27	22.57	26.06	21.41	28.75	20.18	31.34
	750	36.75	9.25	35.23	17.70	34.35	21.65	33.42	25.44	32.43	29.08	31.32	32.58	30.16	35.94	28.93	39.17
	900	45.50	11.10	43.98	21.24	43.10	25.98	42.17	30.53	41.18	34.90	40.07	39.09	38.90	43.13	37.68	47.01
	1050	54.24	12.95	52.73	24.77	51.85	30.31	50.92	35.62	49.93	40.72	48.82	45.61	47.65	50.31	46.43	54.84
	1200	62.99	14.80	61.48	28.31	60.60	34.64	59.67	40.71	58.68	46.53	57.57	52.12	56.40	57.50	55.18	62.67
	1350	71.74	16.65	70.23	31.85	69.35	38.97	68.42	45.80	67.43	52.35	66.32	58.64	65.15	64.69	63.93	70.51
	1500	80.49	18.50	78.98	35.39	78.10	43.30	77.17	50.89	76.18	58.16	75.07	65.16	73.90	71.88	72.68	78.34
GTV-250A	600	39.70	10.34	37.50	17.81	35.98	21.47	34.72	25.13	33.34	28.89	32.06	32.48	30.67	35.83	29.11	39.97
	750	51.29	12.92	49.09	22.26	47.56	26.84	46.30	31.41	44.92	36.12	43.64	40.59	42.25	44.78	40.69	49.97
	900	62.87	15.50	60.67	26.72	59.15	32.21	57.88	37.70	56.51	43.34	55.22	48.71	53.83	53.74	52.27	59.96
	1050	74.45	18.09	72.25	31.17	70.73	37.57	69.46	43.98	68.09	50.57	66.81	56.83	65.42	62.70	63.86	69.95
	1200	86.03	20.67	83.83	35.62	82.31	42.94	81.04	50.26	79.67	57.79	78.39	64.95	77.00	71.65	75.44	79.95
	1350	97.61	23.26	95.41	40.07	93.89	48.31	92.63	56.55	91.25	65.01	89.97	73.07	88.58	80.61	87.02	89.94
	1500	109.2	25.84	107.0	44.53	105.5	53.68	104.2	62.83	102.8	72.24	101.6	81.19	100.2	89.57	98.60	99.93



GTV 型性能表 (真空用)

GTV TYPE PERFORMANCE TABLE (FOR VACUUM)


GTV TYPE PERFORMANCE TABLE (FOR VACUUM)																	
TYPE	RPM	Qs(m ³ /min)						PRESSURE(mmAq)						La(kW)			
		-1000		-2000		-2500		-3000		-3500		-4000		-4500		-5000	
		Qs	La	Qs	La	Qs	La	Qs	La	Qs	La	Qs	La	Qs	La	Qs	La
GTV-300	600	59.53	14.25	56.83	27.26	55.37	33.35	53.69	39.19	52.00	44.80	50.20	50.18	48.18	55.36	46.16	60.34
	750	76.37	17.81	73.68	34.07	72.22	41.69	70.53	48.99	68.85	56.00	67.05	62.72	65.03	69.20	63.01	75.42
	900	93.22	21.38	90.52	40.89	89.06	50.02	87.38	58.79	85.69	67.20	83.90	75.27	81.88	83.04	79.85	90.51
	1050	110.1	24.94	107.4	47.70	105.9	58.36	104.2	68.58	102.5	78.40	100.7	87.81	98.72	96.88	96.70	105.6
	1200	126.9	28.50	124.2	54.52	122.8	66.70	121.1	78.38	119.4	89.60	117.6	100.4	115.6	110.7	113.5	120.7
	1350	143.8	32.06	141.1	61.33	139.6	75.04	137.9	88.18	136.2	100.8	134.4	112.9	132.4	124.6	130.4	135.8
	1500	160.6	35.63	157.9	68.15	156.5	83.37	154.8	97.98	153.1	112.0	151.3	125.4	149.3	138.4	147.2	150.8
GTV-300A	600	89.0	21.04	85.3	36.86	82.8	44.47	80.53	53.34	78.45	60.56	76.06	68.03	73.25	77.00	69.73	84.74
	700	105.6	24.54	101.9	43.01	99.4	51.88	97.14	62.23	95.05	70.65	92.72	79.37	89.84	89.83	86.33	98.86
	800	122.2	28.05	118.5	49.15	116.0	59.29	113.7	71.12	111.6	80.7	109.3	90.7	106.4	102.7	102.9	113.0
	900	138.8	31.56	135.1	55.29	132.6	66.70	130.3	80.00	128.2	90.8	125.9	102.0	123.0	115.5	119.5	127.1
	1000	155.4	35.06	151.7	61.44	149.2	74.11	146.9	88.89	144.9	100.9	142.5	113.4	139.6	128.3	136.1	141.2
	1100	172.0	38.57	168.3	67.58	165.8	81.52	163.5	97.78	161.4	111.0	159.1	124.7	156.2	141.2	152.7	155.3
	1200	188.6	42.07	184.9	73.72	182.4	88.93	180.1	106.7	178.1	121.1	175.7	136.1	172.8	154.0	169.3	169.5
GTV-350	600	139.5	32.72	133.7	57.32	129.8	69.15	125.9	82.94	122.6	94.16	119.1	105.8	114.7	119.8	108.9	131.7
	700	165.2	38.17	159.4	66.87	155.5	80.67	151.7	96.77	148.3	109.9	144.9	123.4	140.4	139.7	134.7	153.7
	800	191.0	43.63	185.2	76.42	181.3	92.20	177.5	110.6	174.1	125.6	170.6	141.1	166.2	159.7	160.5	175.7
	900	216.7	49.08	210.9	85.97	207.0	103.7	203.2	124.4	199.9	141.2	196.4	158.7	191.9	179.6	186.2	197.6
	1000	242.5	54.53	236.7	95.53	232.8	115.2	229.0	138.2	225.6	156.9	222.1	176.3	217.7	199.6	212.0	219.6
	1100	268.2	59.99	262.4	105.1	258.5	126.8	254.7	152.1	251.4	172.6	247.9	193.9	243.4	219.6	237.7	241.5
	1200	294.0	65.44	288.2	114.6	284.3	138.3	280.5	165.9	277.1	188.3	273.6	211.6	269.2	239.5	263.5	263.5
GTV-400	600	238.7	52.99	230.6	95.77	226.8	117.3	221.7	137.9	218.7	159.0	214.5	180.5	211.5	212.8	205.6	223.0
	650	259.9	57.40	251.9	103.8	248.0	127.1	242.9	149.4	240.0	172.3	235.7	195.5	232.			




GT壓送式性能曲線

PRESSURE PERFORMANCE CURVE


GT-040

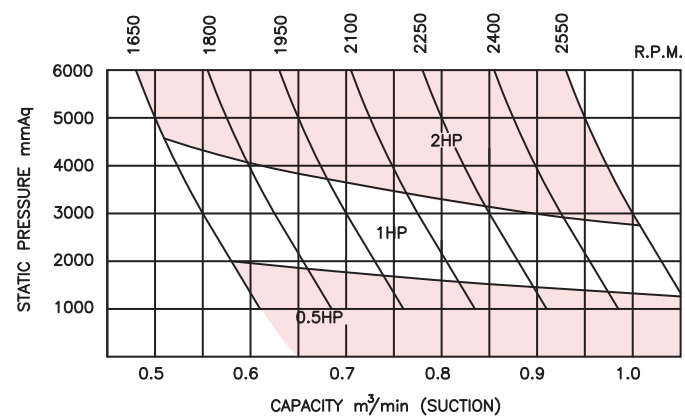


GT-050

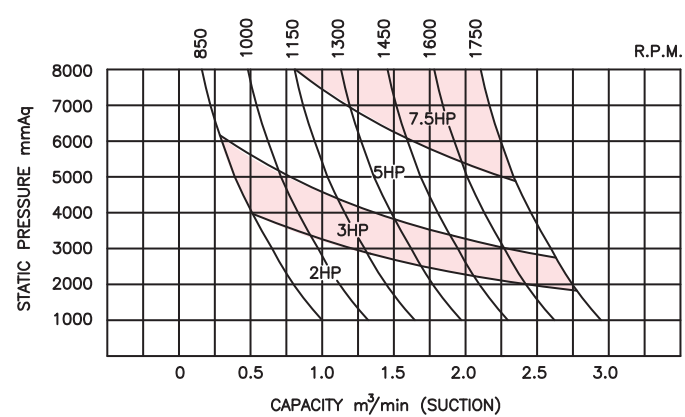


GT-065

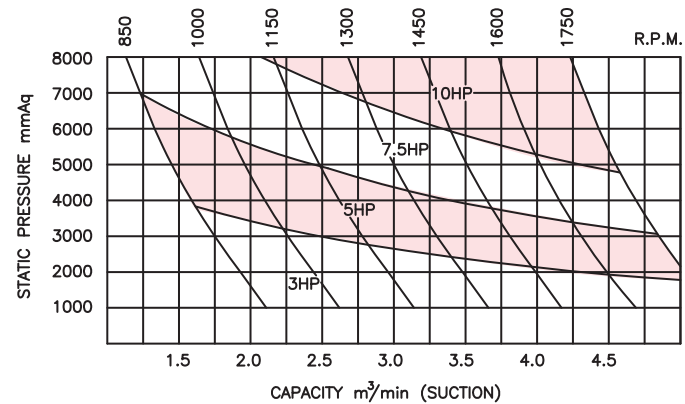


GT-080

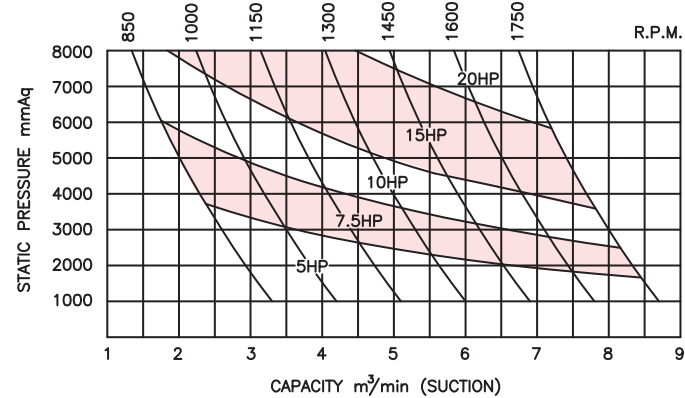


GT-100

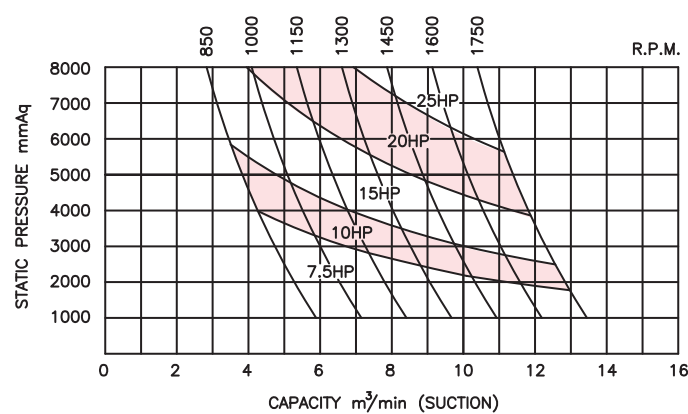


GT-125S

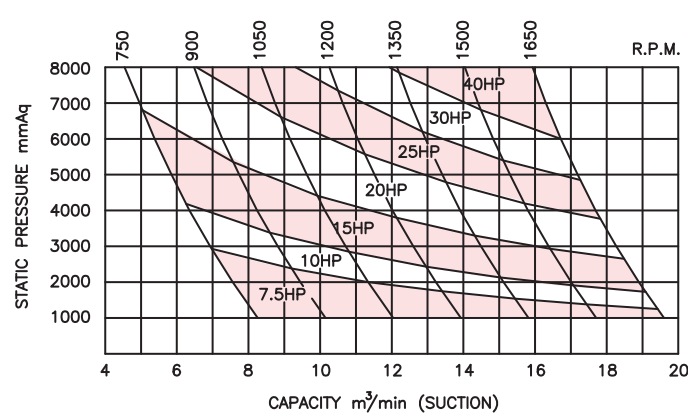

GT-125

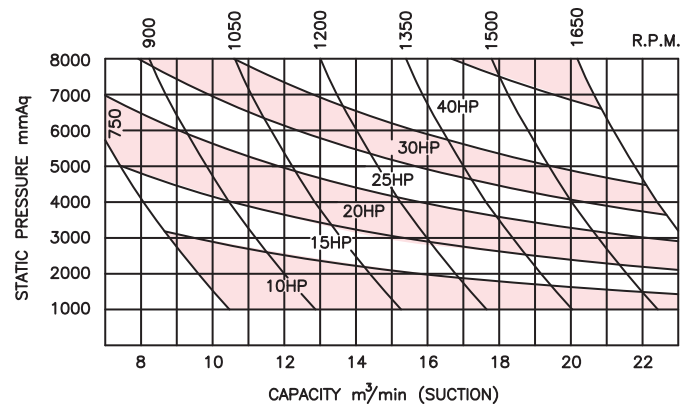


GT-150

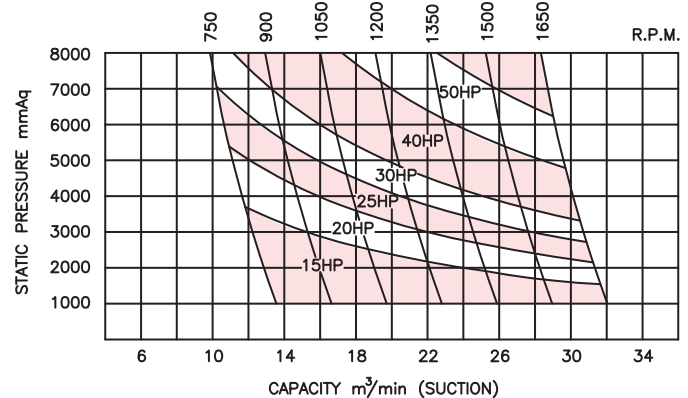


GT壓送式性能曲線

PRESSURE PERFORMANCE CURVE


GT-200

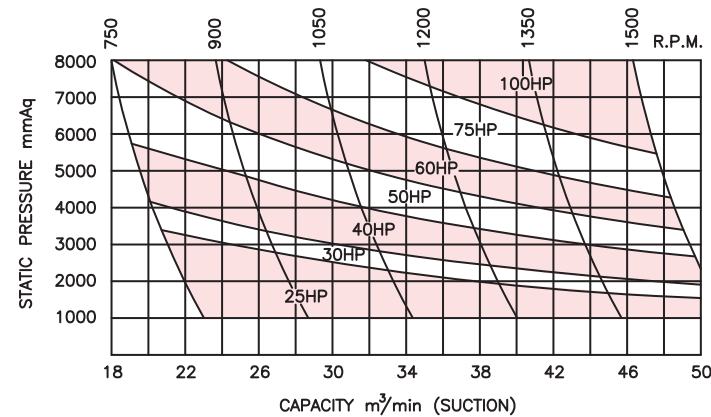


GT-200A

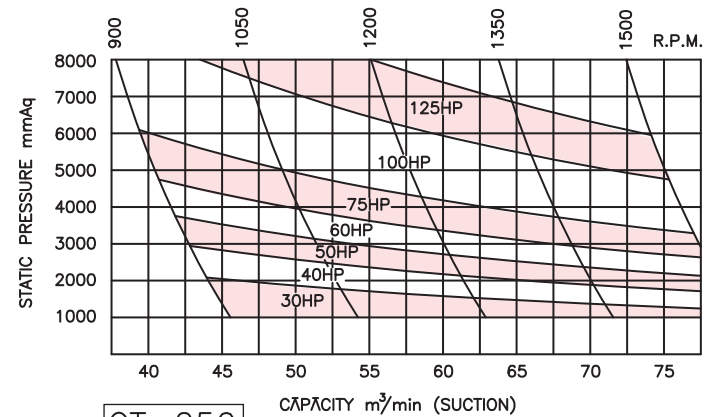


GT-250

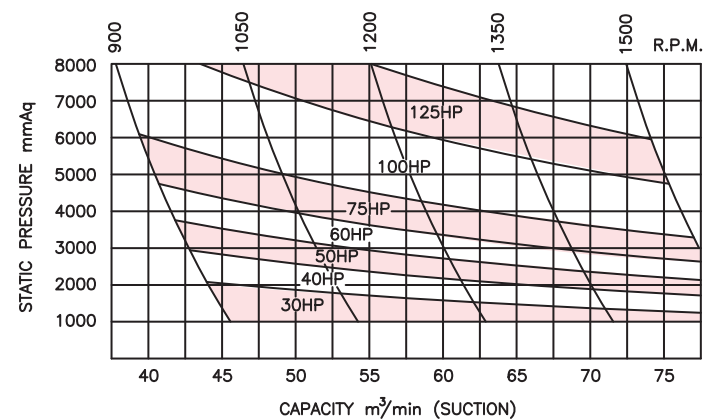


GT-250A

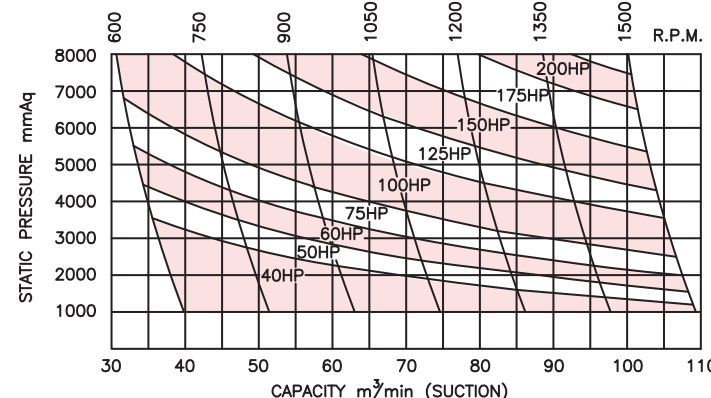


GT-300

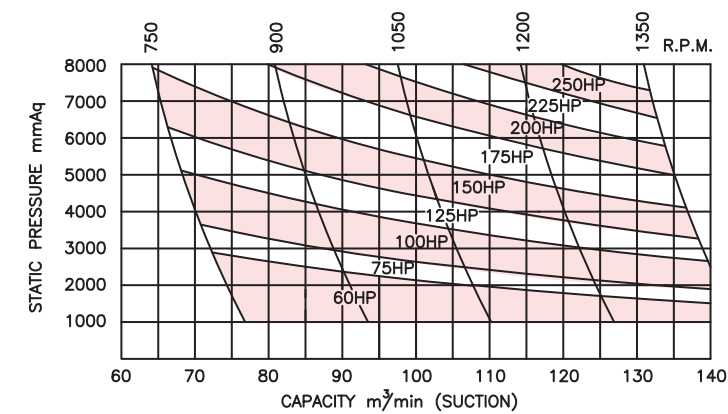


GT-300A

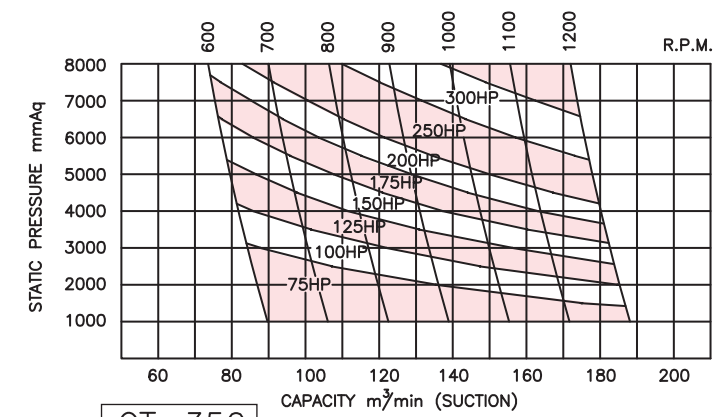

GT-350

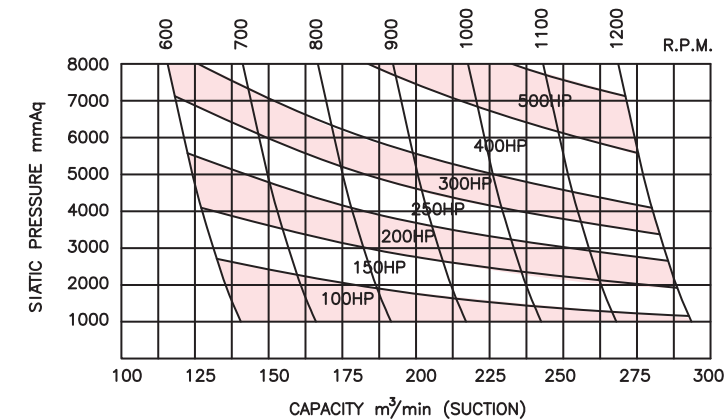

GT-400

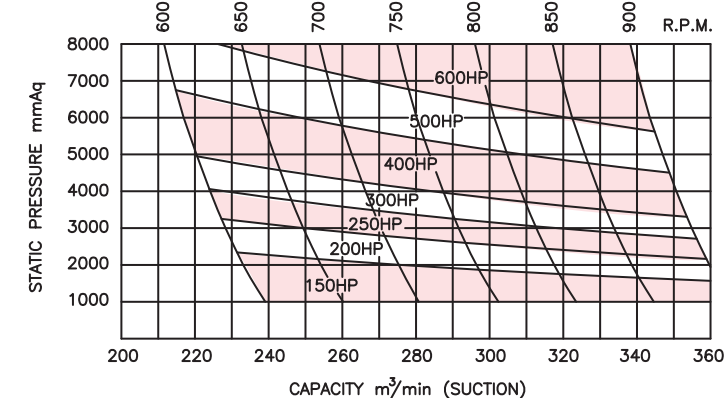





GTV 真空型性能曲線

VACUUM PERFORMANCE CURVE


GTV-040

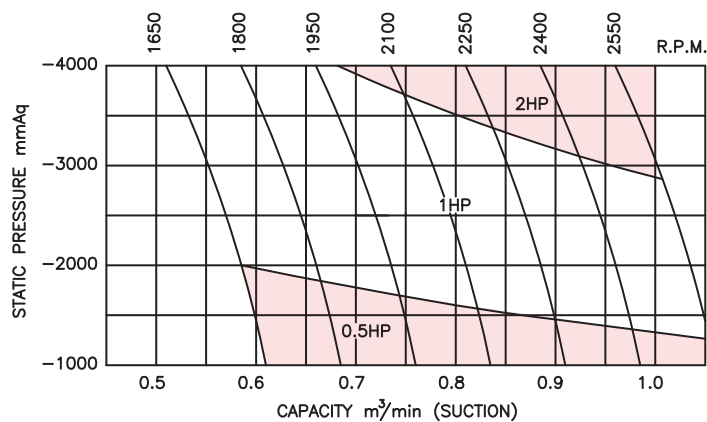


GTV-050

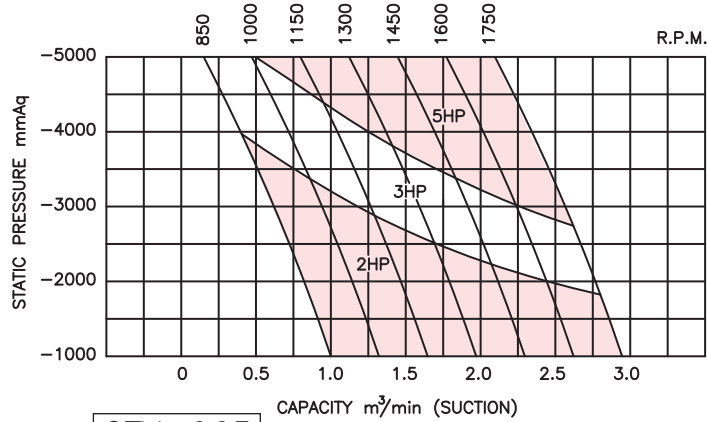


GTV-065

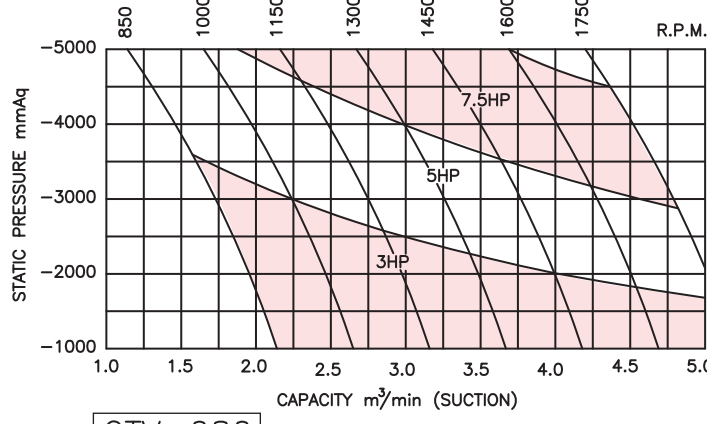


GTV-080

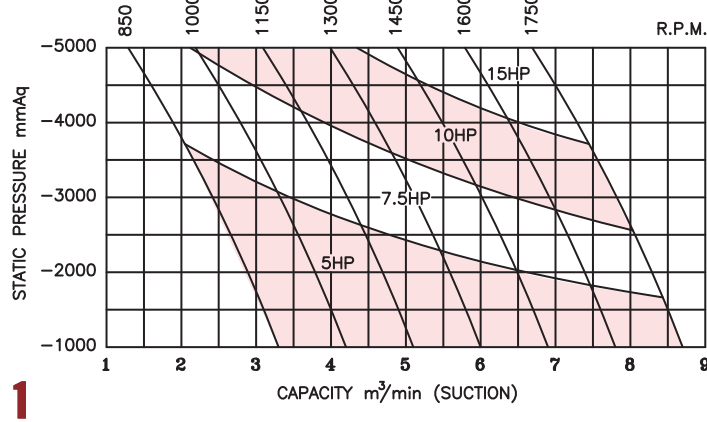


GTV-100

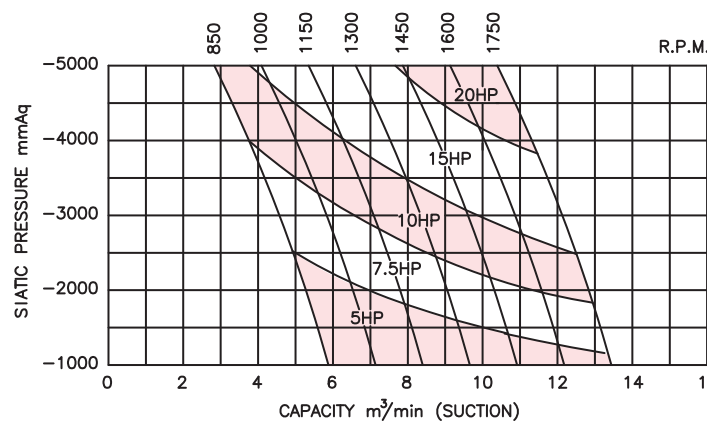


GTV-125S

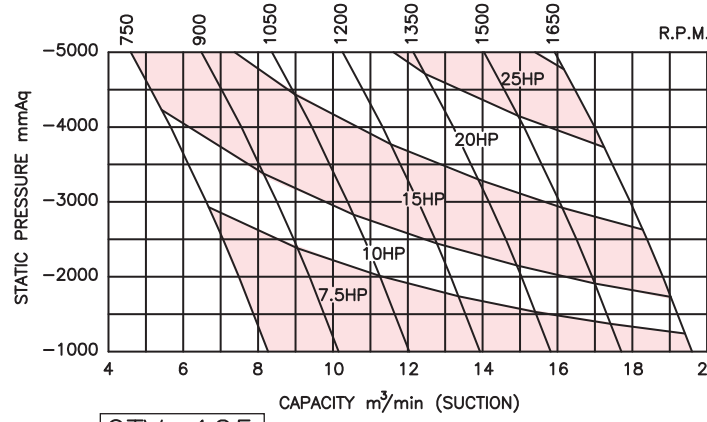

GTV-125

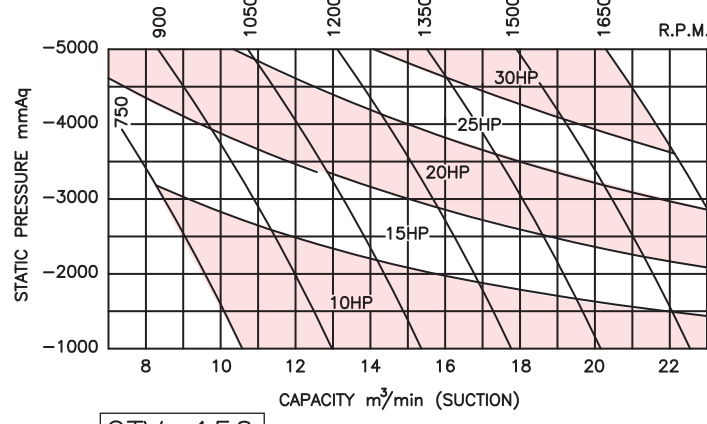


GTV-150

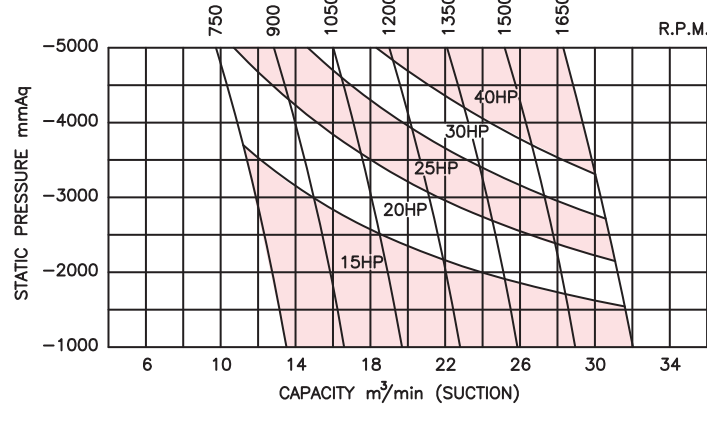


GTV 真空型性能曲線

VACUUM PERFORMANCE CURVE


GTV-200

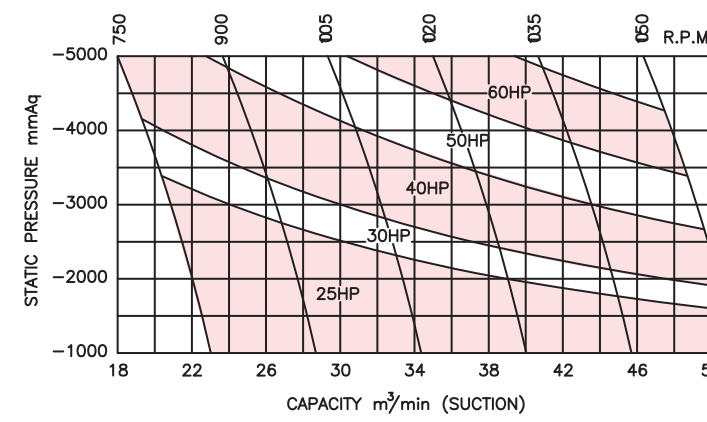


GTV-200A

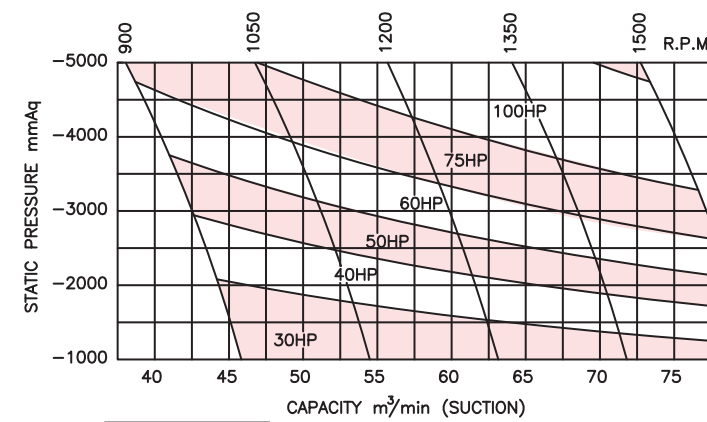


GTV-250

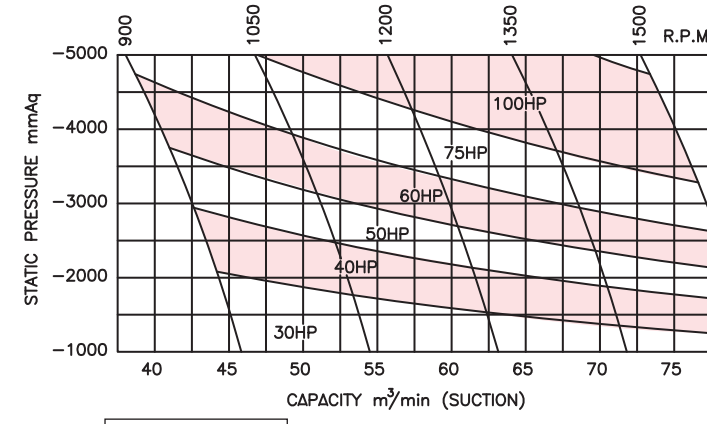


GTV-250A

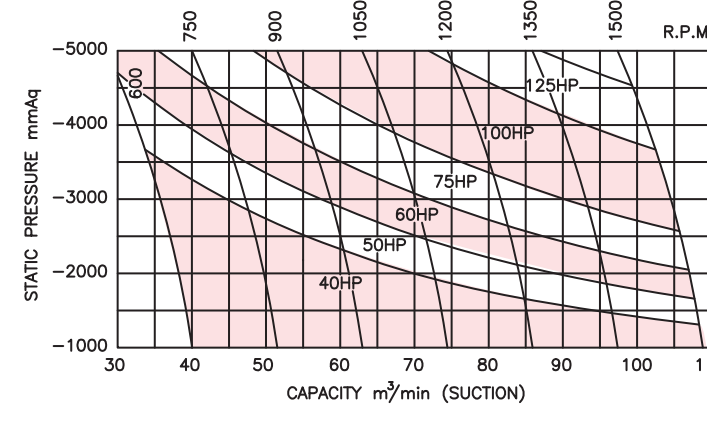


GTV-300

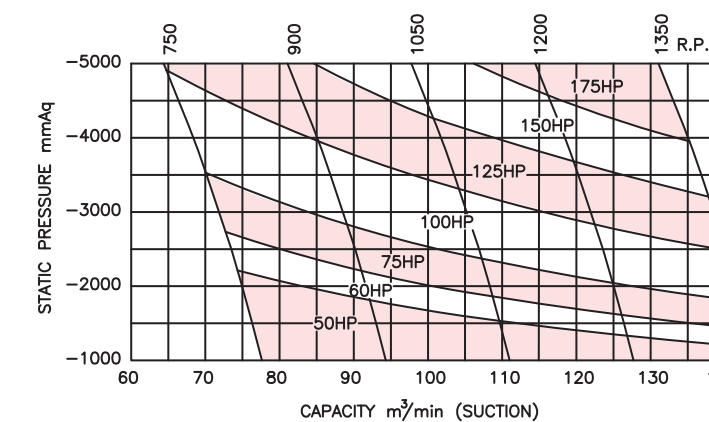


GTV-300A

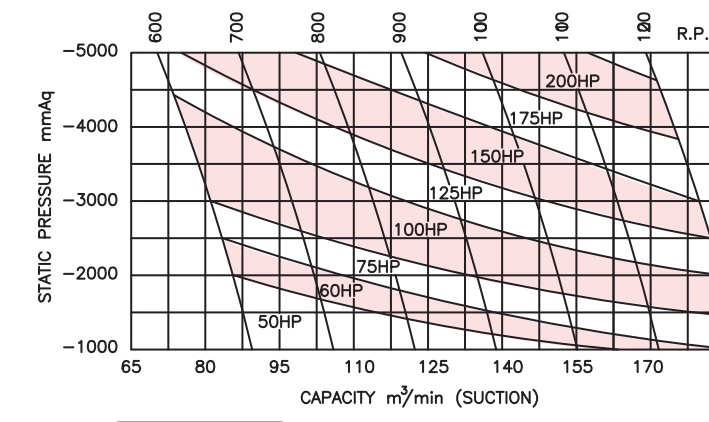

GTV-350

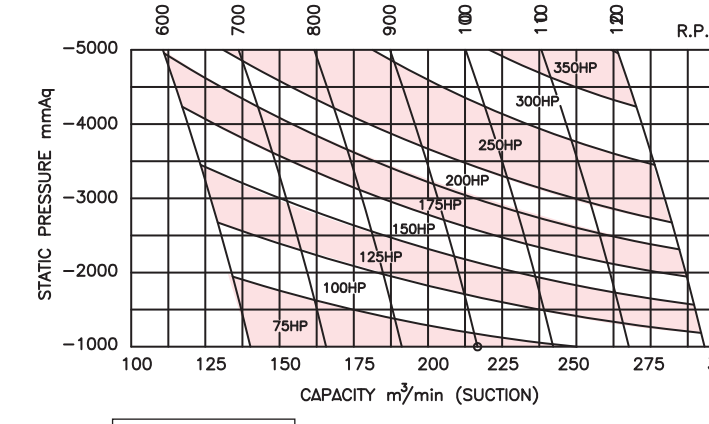

GTV-400

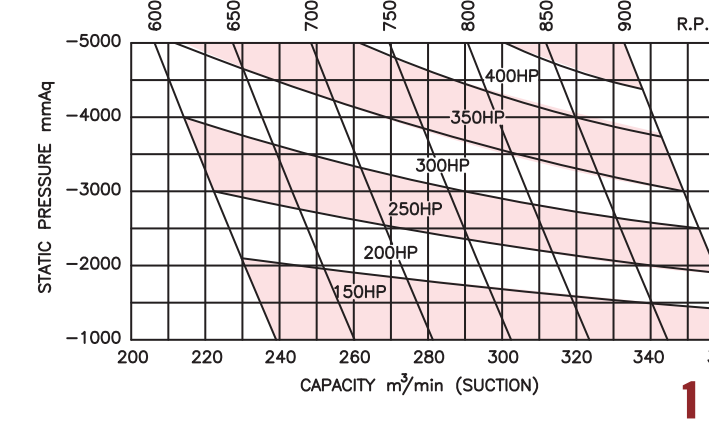



風量計算及性能曲線風量計算及使用方法

HOW TO USE PERFORMANCE CHART

1. 鼓風機的風量可以下型式表示:

- (1) 標準狀態STP風量(Qs):溫度20°C, 絕對壓力10332mmAq, 相對濕度65%。
- (2) 基準狀態NTP風量(Qn):溫度0°C, 絕對壓力10332mmAq, 相對濕度0%。

2. 性能表所示風量是標準狀態STP之吸入風量。

3. 性能表所示壓力是鼓風機之靜壓。

4. 風量在不同壓力、溫度下的轉換公式

$$Q_2 = Q_1 \cdot \frac{P_1}{P_2} \cdot \frac{T_2}{T_1}$$

Q1(m³/min): 在絕對壓力P₁(mmAq), 絕對溫度T₁(°K) 下之風量。

Q2(m³/min): 在絕對壓力P₂(mmAq), 絕對溫度T₂(°K) 下之風量。

5. 靜壓的換算

(1) 壓送的場合

$$P_s = \left(\frac{10332 + P_2}{10332 + P_1} - 1 \right) \cdot 10332$$

(2) 真空的場合

$$P_s = \left(\frac{10332 + P_1}{10332 + P_2} - 1 \right) \cdot 10332$$

P₁:入口靜壓 P₂:出口靜壓 P_s:型錄之靜壓

6. 範例

操作條件 : 風量 5.16 m³/min
入口靜壓 -500 mmAq
出口靜壓 +4260 mmAq
入口溫度 40°C

選用 : 入口風量5.16m³/min, 必須換算成標準狀態(STP)時的風量。

$$Q = 5.16 \cdot \frac{10332 - 500}{10332} \cdot \frac{273 + 20}{273 + 40} = 4.60 \text{ m}^3/\text{min}$$

靜壓換算

$$P_s = \left(\frac{10332 + 4260}{10332 - 500} - 1 \right) \cdot 10332 = 5000 \text{ mmAq}$$

查性能曲線可選擇GT-80、轉速1300RPM, 馬力10HP。

7. 相同風量涵蓋二機種時, 小機種具有經濟性, 大機種則有較低的轉速即低噪音的優點, 請參看噪音表。

1. AIR VOLUME IS GENERAL SHOWN IN TERMS OF

- (1) STANDARD STATE (Qs): AT 20°C, 10332mmAq, AND RH. 65%.
- (2) NORMAL STATE (Qn): AT 0°C, 10332mmAq, AND RH. 0%.

2. PERFORMANCE TABLE SHOWN THE CAPACITY AT THE STANDARD SUCTION STATE.

3. PERFORMANCE TABLE SHOWN THE PRESSURE AT THE STATIC PRESSURE.

4. VOLUME CONVERSION FORMULA

$$Q_2 = Q_1 \cdot \frac{P_1}{P_2} \cdot \frac{T_2}{T_1}$$

Q₁ (m³/min): AIR VOLUME IN P₁(mmAq), T₁(°K)。

Q₂ (m³/min): AIR VOLUME IN P₂(mmAq), T₂(°K)。

5. PRESSURE CONVERSION FORMULA

(1) FOR PRESSURE

$$P_s = \left(\frac{10332 + P_2}{10332 + P_1} - 1 \right) \cdot 10332$$

(2) FOR VACUUM

$$P_s = \left(\frac{10332 + P_1}{10332 + P_2} - 1 \right) \cdot 10332$$

P₁ : SUCTION STATIC PRESSURE
P₂ : DISCHARGE STATIC PRESSURE
P_s : STATIC PRESSURE IN CATALOG

6. EXAMPLE

OPERATING SPECIFICATIONS :

AIR VOLUME 5.16 m³/min
SUCTION STATIC PRESSURE -500 mmAq
DISCHARGE STATIC PRESSURE +4260 mmAq
SUCTION TEMPERATURE 40°C

CHOICE : AIR VOLUME(5.16 m³/min) CONVERTS TO STP STATE

$$Q = 5.16 \cdot \frac{10332 - 500}{10332} \cdot \frac{273 + 20}{273 + 40} = 4.60 \text{ m}^3/\text{min}$$

STATIC PRESSURE CHANGED TO

$$P_s = \left(\frac{10332 + 4260}{10332 - 500} - 1 \right) \cdot 10332 = 5000 \text{ mmAq}$$

SEE THE PERFORMANCE TABLE ,YOU COULD FIND GT-80、1300RPM、10HP FITS THE SPECIFICATIONS。

7. AS THE SELECTION COVERS TWO MODELS , YOU MAY SELECT THE SMALLER FOR ECONOMIC , BUT YOU CHOICE THE BIGGER WITH THE ADVANTAGE OF LOWER RPM. PLEASE REFER TO NOISE CHART IN THE FOLLOWING PAGE。



噪音表











NOISE LEVEL OF BLOWER

◆ 噪音資料係距離鼓風機1m及附標準消音器所測量的平均值。

◆ NOISE LEVEL MEASURED AT DISTANCE 1 METER FOR THE BLOWER FITTED WITH STANDARD SILENCER.

◆ 噪音值因加裝管路的長度及周圍的環境狀況而有所改變。







◆ NOISE LEVEL MAYBE DIFFERENT ACCORDING TO THE EXTEND PIPE LENGTH AND AMBIENT CONDITION.

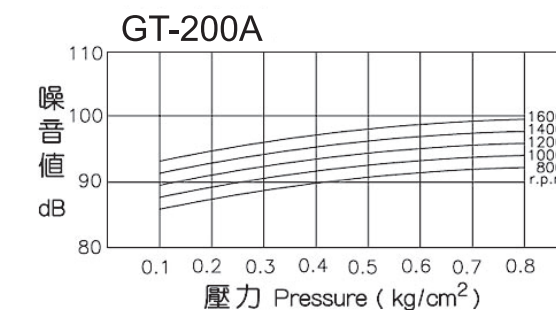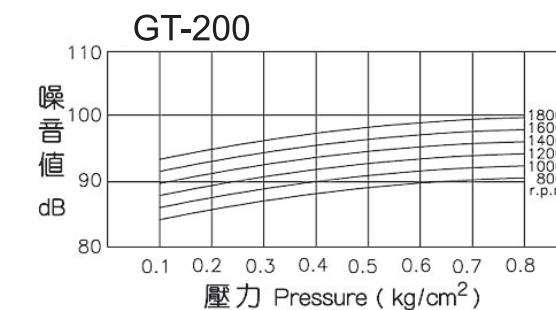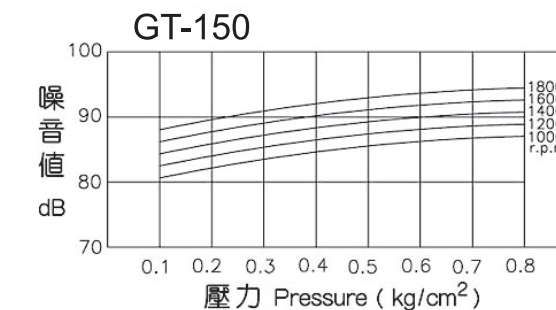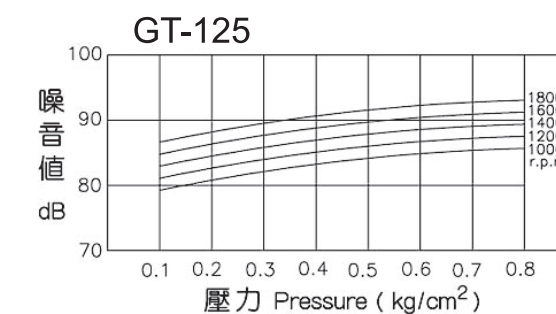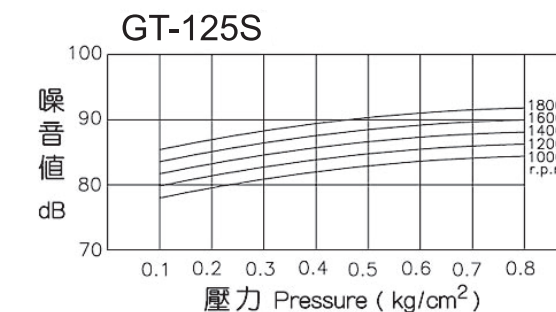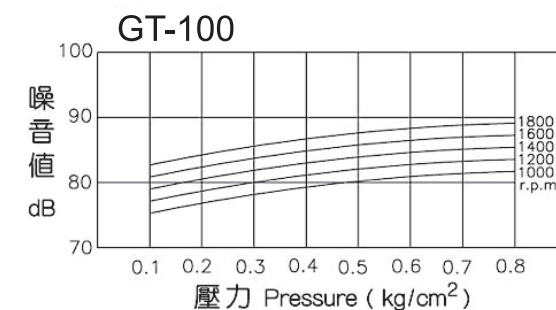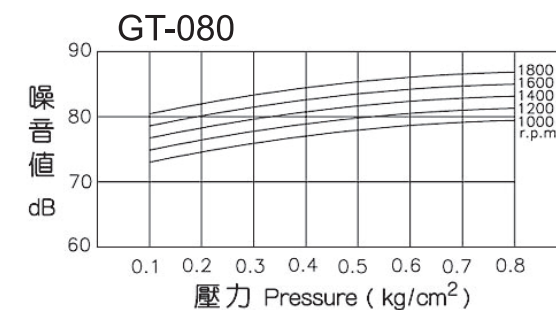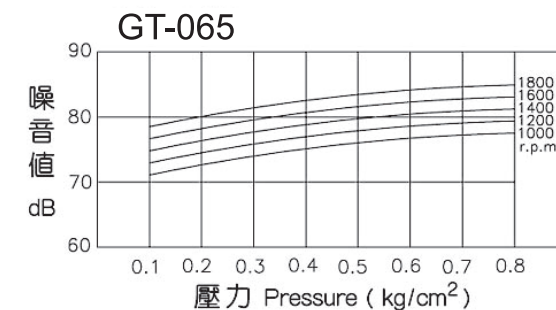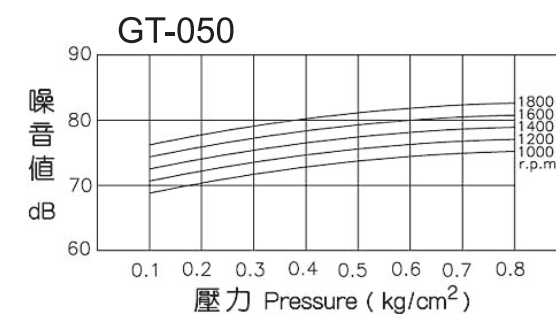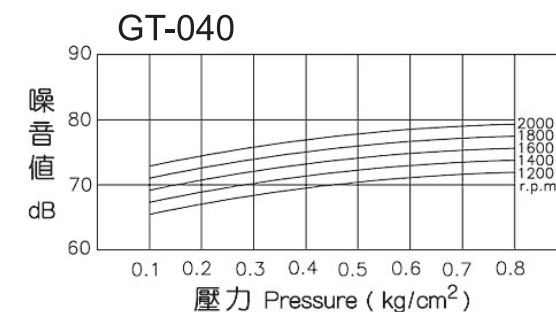





噪音表

NOISE LEVEL OF BLOWER

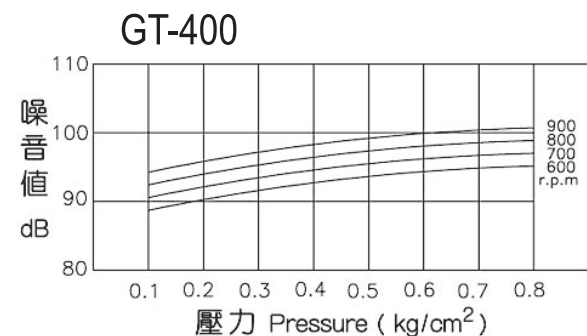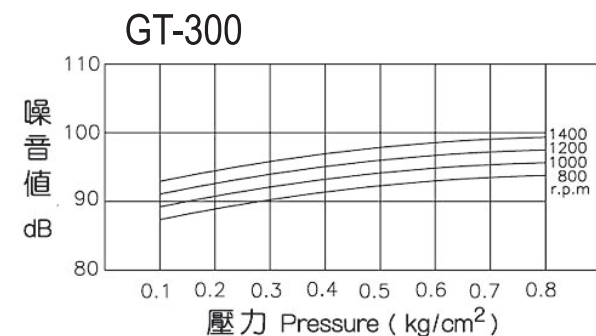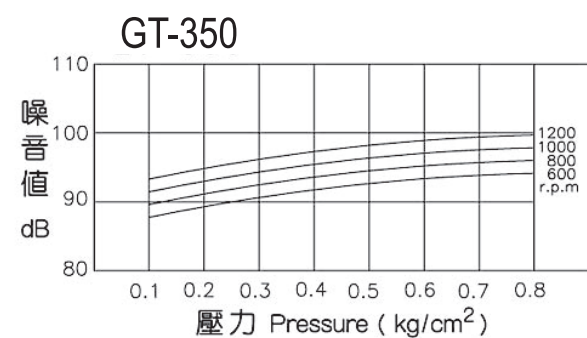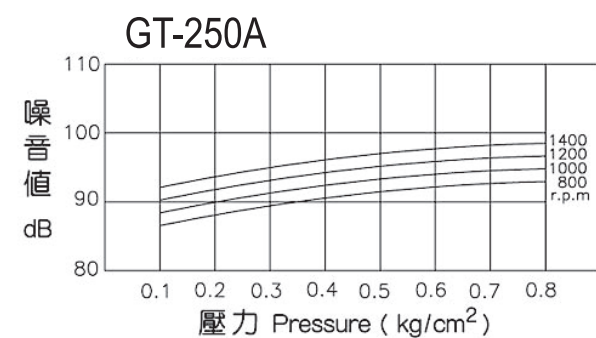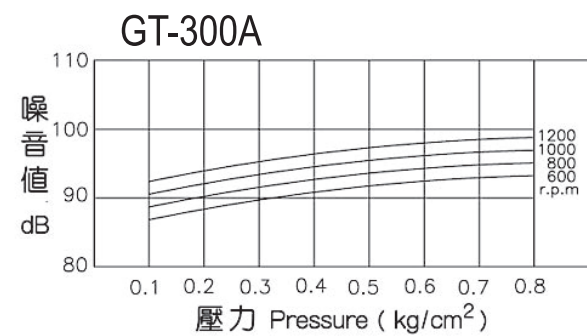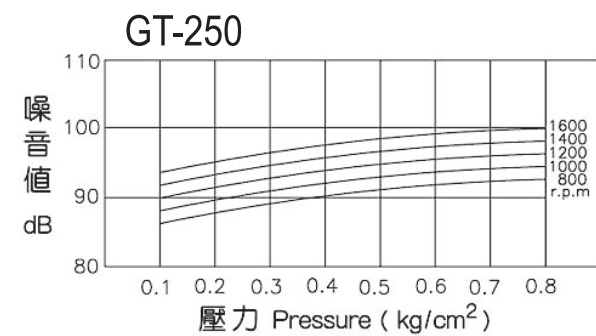

外形尺寸圖



OUTLINE DIMENSIONS

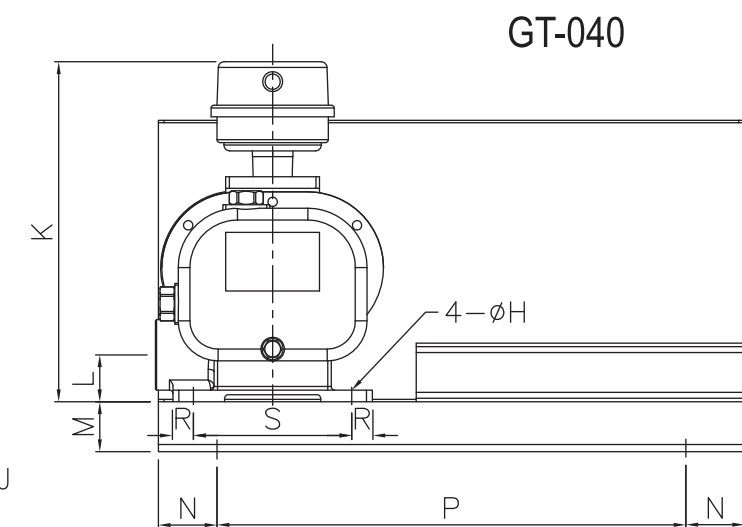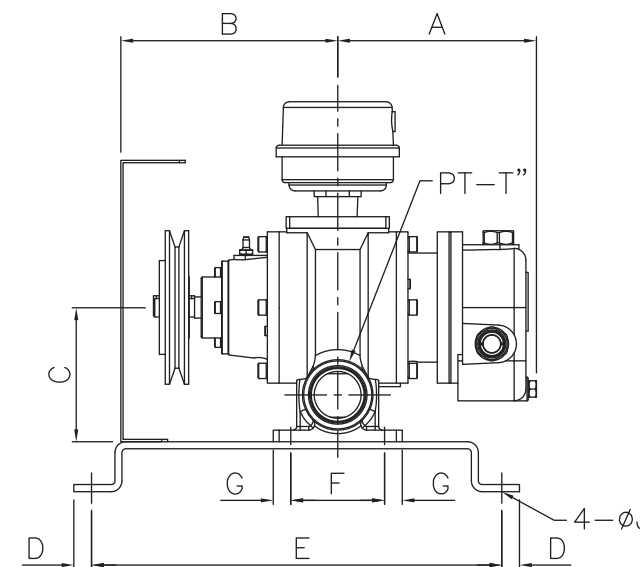

UNITS:mm

MODEL	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	S	T	Wt.(Kg)
GT-040	169	185	115	15	350	80	15	12	12	333	40	43	50	400	17.5	135	1.5	25

◆ 表列重量僅為主機重量 (WT.FOR MAIN BODY)

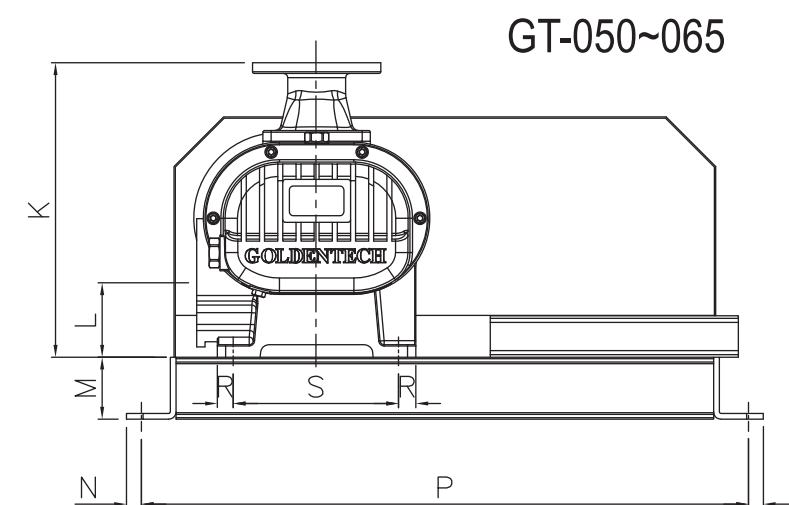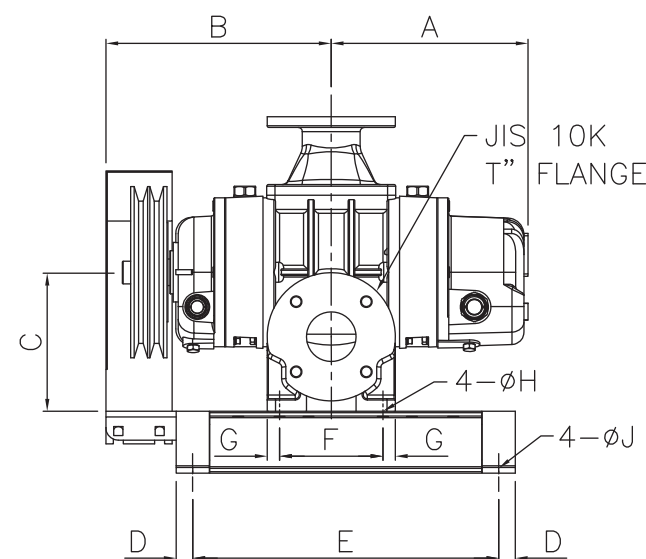

UNITS:mm

MODEL	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	S	T	Wt.(Kg)
GT-050	238	273	168	20	370	125	15	15	15	356	90	75	18	734	20	200	2	76
GT-065	281	315	173	20	370	210	15	15	15	360	95	75	18	734	20	200	2.5	94

◆ 表列重量僅為主機重量 (WT.FOR MAIN BODY)

單位換算

UNITS CONVERSION

壓力 PRESSURE


	mbar	Pa	atm	lbf/in ²	kgf/cm ²	in-Hg	mmAq
1 mbar	1	10 ²	9.869x10 ⁻⁴	1.45x10 ⁻²	1.02x10 ⁻³	2.953x10 ⁻²	10.197
1 Pa	0.01	1	9.869x10 ⁻⁶	1.45x10 ⁻⁴	1.02x10 ⁻⁵	2.953x10 ⁻⁴	0.102
1 atm	1.013x10 ³	1.013x10 ⁵	1	14.7	1.033	29.92	1.033x10 ⁴
1 lbf/in ²	68.95	6.895x10 ²	6.805x10 ⁻²	1	7.03x10 ⁻²	2.036	7.03x10 ²
1 kgf/cm ²	9.807x10 ²	9.807x10 ⁴	0.968	14.22	1	28.96	10 ⁴
1 in-Hg	33.86	3.386x10 ³	3.342x10 ⁻²	0.491	3.45x10 ⁻²	1	3.45x10 ²
1 mmAq	9.807x10 ⁻²	9.807	9.677x10 ⁻³	1.42x10 ⁻³	10 ⁻⁴	2.896x10 ⁻³	1

風量 CAPACITY

	m ³ /min	m ³ /hr	l/min	ft ³ /min
1 m ³ /min	1	60	1000	35.31
1 m ³ /hr	0.017	1	16.67	0.589
1 l/min	0.001	0.06	1	0.035
1 ft ³ /min	0.028	1.699	28.32	1

功率 POWER

	kg-m/sec	kW	HP	PS
1 kg-m/sec	1	0.01	0.013	0.013
1 kW	101.97	1	1.341	1.360
1 HP	76.038	0.746	1	1.014
1 PS	75	0.736	0.986	1

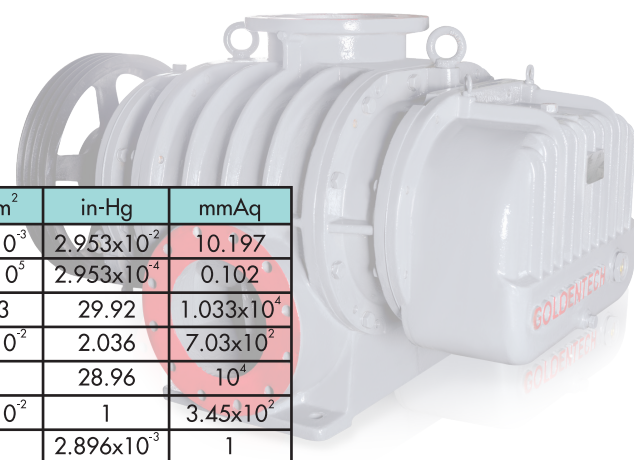




外形尺寸圖

OUTLINE DIMENSIONS


GT-080~150

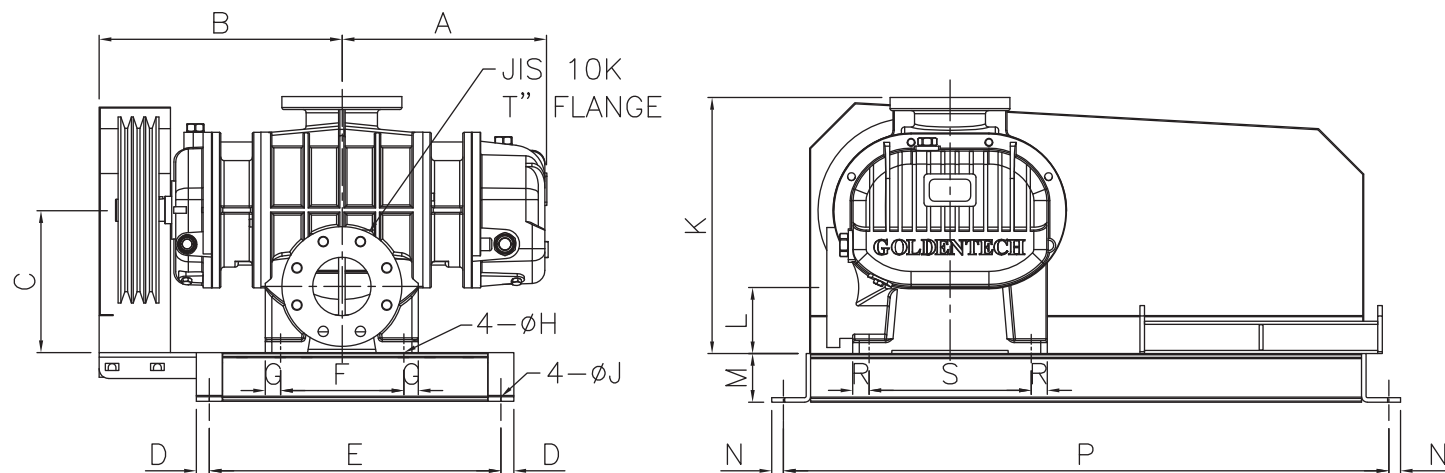

UNITS:mm

MODEL	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	S	T	Wt.(Kg)
GT-080	318	375	220	20	450	190	23	19	15	395	102	75	18	934	25	250	3	167
GT-100	368	425	220	20	450	290	20	19	15	395	115	75	18	934	25	250	4	193
GT-125S	406	445	265	25	605	230	26	19	19	475	145	100	20	1190	25	350	5	319
GT-125	446	490	305	25	605	320	21	19	19	520	155	100	20	1190	25	350	5	353
GT-150	501	543	305	25	605	425	24	19	19	520	155	100	20	1190	25	350	6	418

◆ 表列重量僅為主機重量 (WT.FOR MAIN BODY)

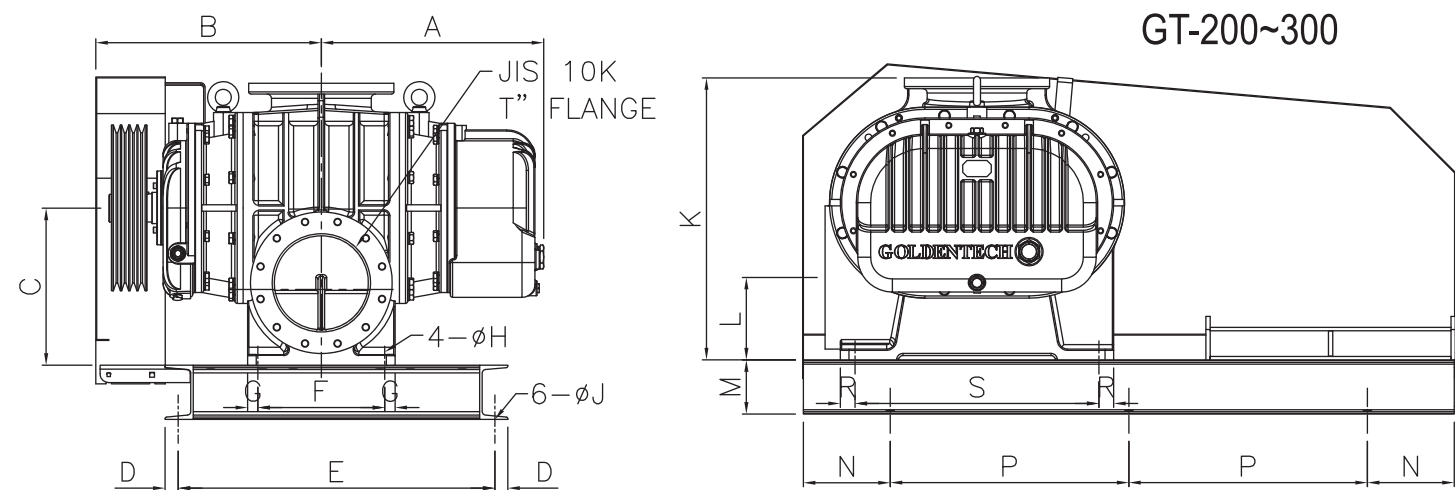

GT-200~300

UNITS:mm

MODEL	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	S	T	Wt.(Kg)
GT-200	513	520	362	30	730	270	35	23	19	650	190	125	200	550	40	550	8	720
GT-200A	608	615	363	30	730	460	35	23	19	665	190	125	200	550	40	550	8	897
GT-250	608	595	388	30	730	460	35	23	19	675	225	125	200	550	40	550	10	913
GT-250A	692	768	500	40	1120	400	65	27	24	875	250	200	200	800	55	620	10	1665
GT-300	817	893	500	40	1120	650	65	27	24	875	250	200	200	800	55	620	12	2010


◆ 表列重量僅為主機重量 (WT.FOR MAIN BODY)




外形尺寸圖

OUTLINE DIMENSIONS



GT-350

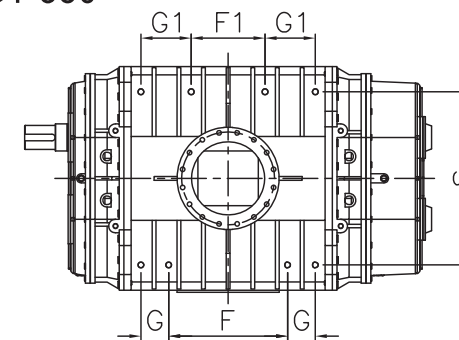

GT-300A

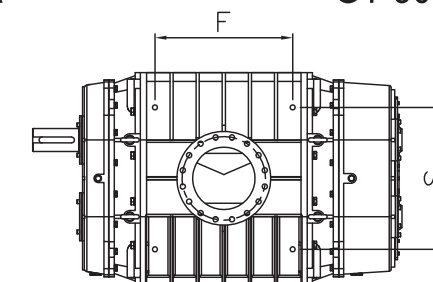


GT-300A~350

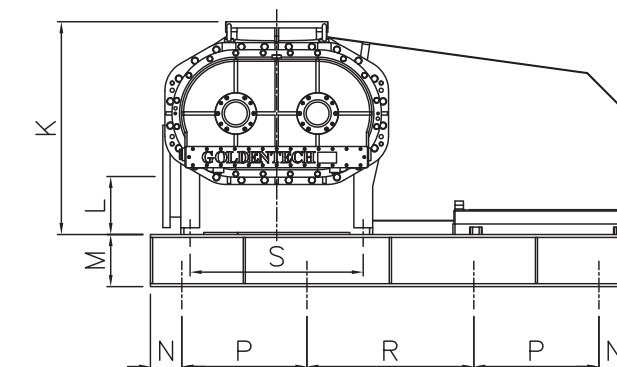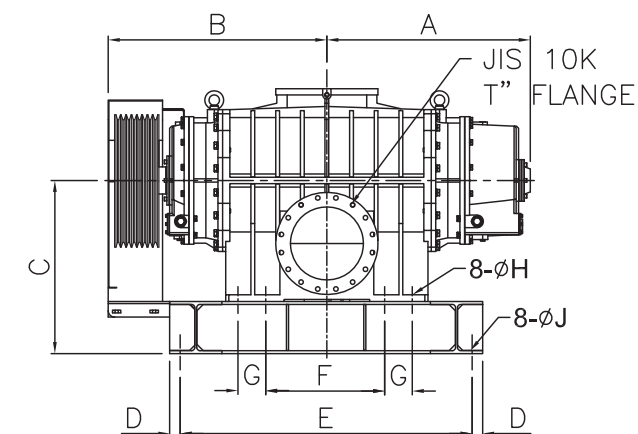

UNITS:mm

MODEL	A	B	C	D	E	F	F1	G	G1	H	J	K	L	M	N	P	R	S	T	Wt.(Kg)
GT-300A	854	982	505	40	1300	660				27	24	930	243	244	175	550	550	680	12	3200
GT-350	975	1048	580	50	1400	570	354	133	241	28	24	1020	278	250	150	600	800	830	14	4100

◆ 表列重量僅為主機重量 (WT.FOR MAIN BODY)

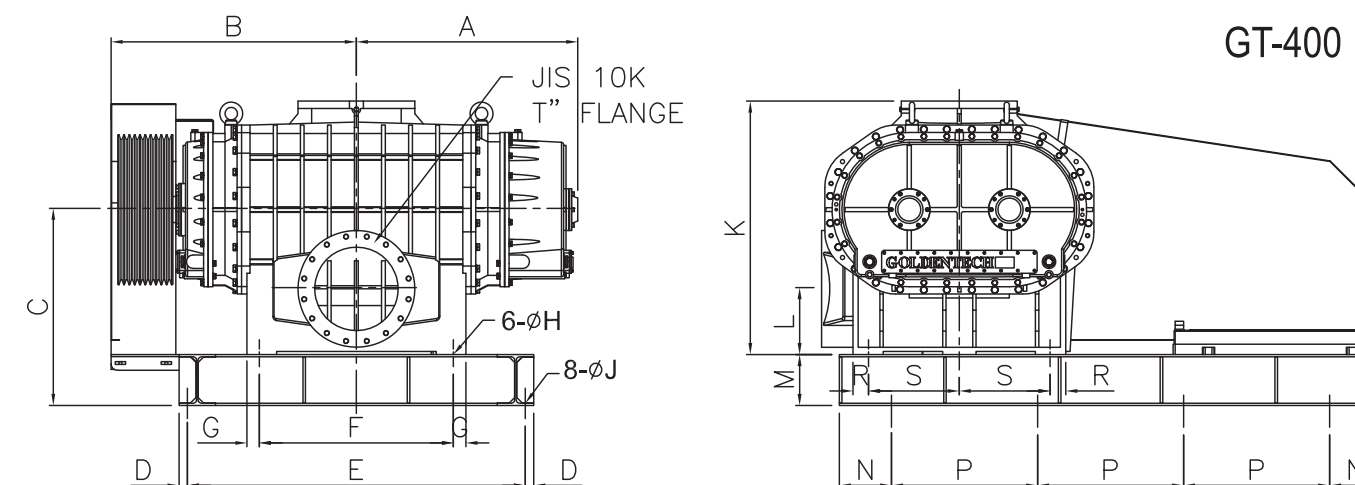

GT-400

UNITS:mm


MODEL	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	S	T	Wt.(Kg)
GT-400	1061	1176	939	40	1620	930	60	35	26	1215	315	250	250	700	75	435	16	4650

◆ 表列重量僅為主機重量 (WT.FOR MAIN BODY)



構造圖 & 材質表

STRUCTURE & MATERIAL LIST

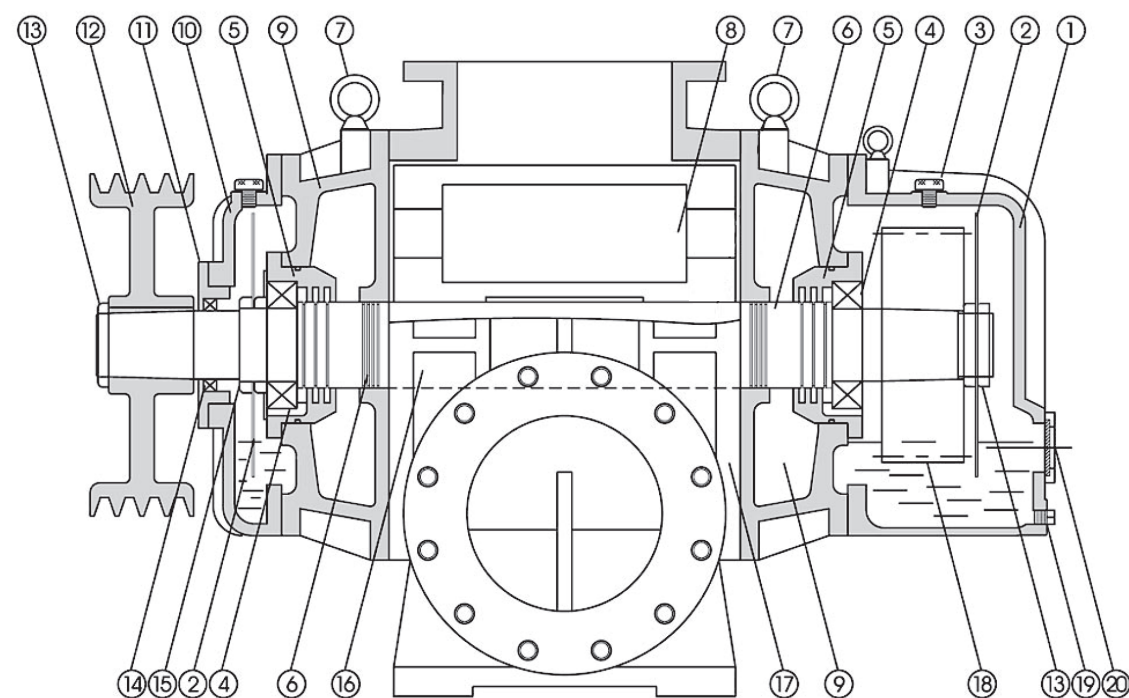


NO.	NAME	MATERIAL	NO.	NAME	MATERIAL
1.	Gear case 齒輪箱	FC250	11.	Seal case 油封座	FC250
2.	Oil splash 甩油片	SS400	12.	Pulley 皮帶輪	FC250
3.	Oil plug 加油塞	S45C	13.	Nut 螺帽	SS400
4.	Bearing 軸承	SUJ2	14.	Seal 油封	NBR
5.	Bearing case 軸承座	FC250	15.	Nut 螺帽	SS400
6.	Labyrinth seal 軸封	SS400	16.	Shaft 主軸	SCM440
7.	Eye bolt 吊環	S45C	17.	Main casing 主體	FC250
8.	Rotor 葉輪	FC250	18.	Timing gear 正齒輪	SCM415
9.	Side cover 側蓋	FC250	19.	Oil drain 洩油塞	S45C
10.	Oil case 油箱	FC250	20.	Oil gauge 油鏡	S45C




安裝圖

INSTALLATIONS

A. 壓送配管的場合 (FOR PRESSURE)

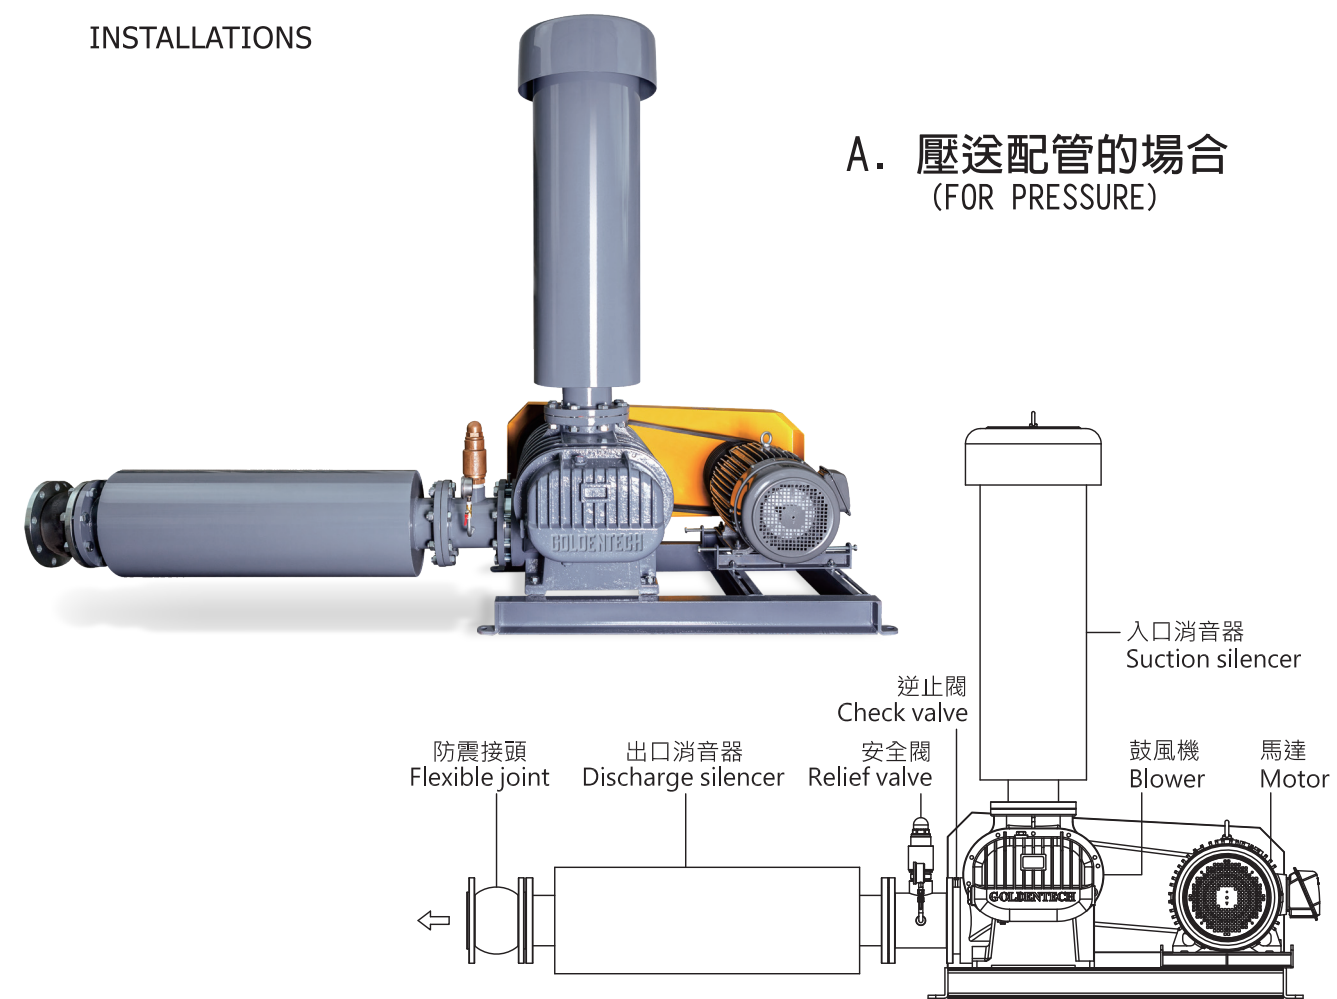


B. 真空配管的場合 (FOR VACUUM)

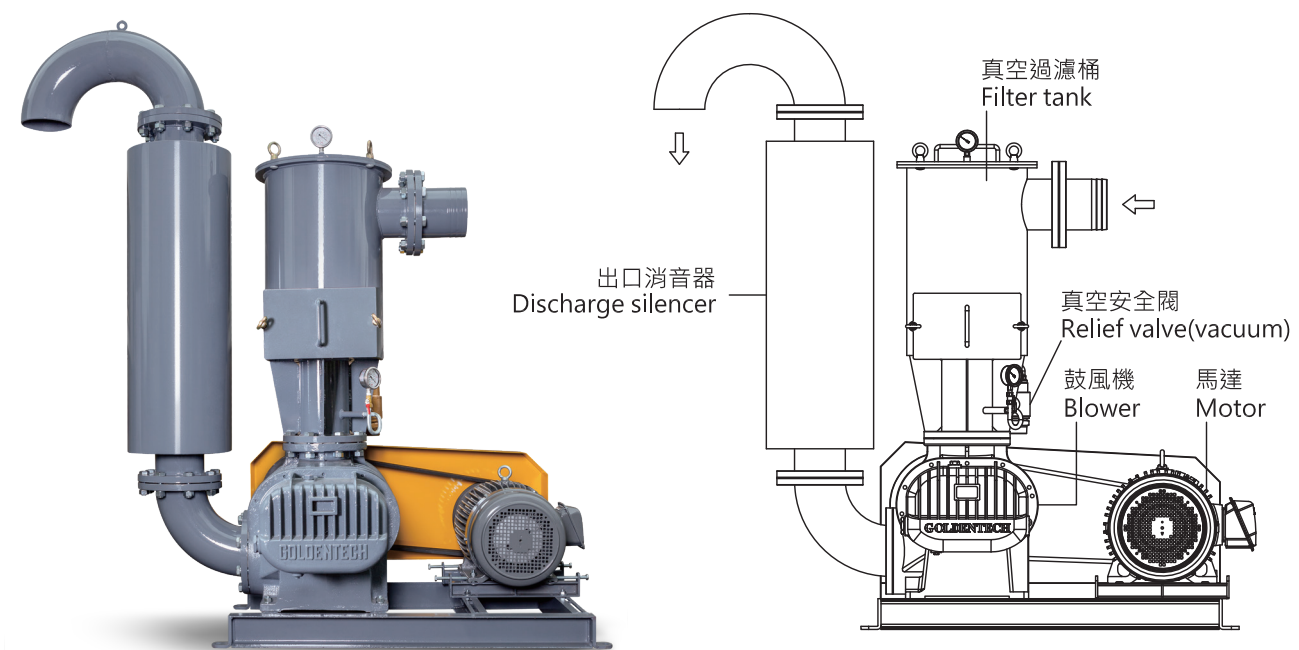


附屬配件 ACCESSORIES

室外入口消音器 OUTDOOR SILENCER




MODEL	A	B	C	適用機型
O-050	682	50	165	GT-050
O-065	682	65	165	GT-065
O-080	782	80	216	GT-080
O-100	782	100	216	GT-100
O-125	1303	125	349	GT-125
O-150	1303	150	349	GT-150
O-200	2018	200	525	GT-200
O-250	2023	250	600	GT-250
O-300	2226	300	700	GT-300
O-350	2536	350	797	GT-350
O-400	2538	400	797	GT-400

室內入口消音器 INDOOR SILENCER




MODEL	A	B	C	適用機型
I-050	680	50	165	GT-050
I-065	680	65	165	GT-065
I-080	784	80	216	GT-080
I-100	834	100	216	GT-100
I-125	1300	125	349	GT-125
I-150	1300	150	349	GT-150
I-200	2030	200	525	GT-200
I-250	2030	250	600	GT-250
I-300	2230	300	700	GT-300
I-350	2570	350	800	GT-350
I-400	2570	400	800	GT-400

出口消音器 DISCHARGE SILENCER




MODEL	A	B	C	適用機型
D-050	657	50	165	GT-050
D-065	657	65	165	GT-065
D-080	757	80	216	GT-080
D-100	757	100	216	GT-100
D-125	1188	125	349	GT-125
D-150	1188	150	349	GT-150
D-200	1726	200	525	GT-200
D-250	1730	250	600	GT-250
D-300	1750	300	703	GT-300
D-350	2224	350	797	GT-350
D-400	2228	400	797	GT-400

臥式室內入口消音器 HORIZONTAL SILENCER




MODEL	A	B	C	適用機型
RO-050	586	165	120	GT-050
RO-065	586	165	120	GT-065
RO-080	721	216	150	GT-080
RO-100	721	216	150	GT-100
RO-125	1228	351	250	GT-125
RO-150	1228	351	250	GT-150
RO-200	1866	528	400	GT-200
RO-250	1866	602	400	GT-250
RO-300	2076	706	400	GT-300
RO-350	2373	800	400	GT-350
RO-400	2371	800	400	GT-400

三通管 "T" JOINT




MODEL	A	B	L	適用機型
T-050	1.5"	50	150	GT-050
T-065	1.5"	65	150	GT-065
T-080	1.5"	80	165	GT-080
T-100	1.5"	100	165	GT-100
T-125	2"	125	205	GT-125
T-150	2"	150	210	GT-150
T-200	2"	200	265	GT-200

三通管 "T" JOINT




MODEL	A	B	L	適用機型
T-250	80	250	295	GT-250
T-300	80	300	350	GT-300
T-350	125	350	400	GT-350
T-400	125	400	500	GT-400

安全閥 RELIEF VALVE




MODEL	A	B	C	適用機型
R-038	176	1.5"	19	GT-050~100
R-050	232	2"	26	GT-125~200

安全閥 RELIEF VALVE




MODEL	A	B	C	適用機型
R-080	500	3"	80	GT-250~300
R-125	670	5"	125	GT-350~400

伸縮接頭 EXPANSION JOINT



MODEL	A	B	L	適用機型
JF-050	50	155	150	GT-050
JF-065	65	175	150	GT-065
JF-080	80	185	150	GT-080
JF-100	100	210	150	GT-100
JF-125	125	250	150	GT-125
JF-150	150	280	150	GT-150
JF-200	200	330	200	GT-200
JF-250	250	400	200	GT-250
JF-300	300	445	200	GT-300
JF-350	350	490	230	GT-350
JF-400	400	560	230	GT-400


防震接頭 FLEXIBLE JOINT



MODEL	A	B	L	適用機型
F-050	50	155	105	GT-050
F-065	65	175	115	GT-065
F-080	80	185	130	GT-080
F-100	100	210	135	GT-100
F-125	125	250	170	GT-125
F-150	150	280	180	GT-150
F-200	200	330	205	GT-200
F-250	250	400	240	GT-250
F-300	300	445	260	GT-300
F-350	350	490	265	GT-350
F-400	400	560	265	GT-400


附屬配件 ACCESSORIES

入口消音器 SHORT SILENCER




MODEL	A	B	適用機型
S-50	338	177	GT-50
S-65	338	177	GT-65

90°彎頭 90° ELBOW




MODEL	A	B	適用機型
HE-050	84	159	GT-050
HE-065	105	105	GT-065
HE-080	122	122	GT-080
HE-100	160	160	GT-100
HE-125	199	199	GT-125
HE-150	237	237	GT-150
HE-200	313	313	GT-200
HE-250	389	389	GT-250
HE-300	465	465	GT-300
HE-350	541	541	GT-350
HE-400	618	618	GT-400

真空過濾筒 FILTER TANK




MODEL	A	B	C	E	H
B-050	393	50	184	216	557
B-065	395	65	186	216	559
B-080	480	80	225	263	679
B-100	480	100	210	263	679

真空過濾筒 FILTER TANK




MODEL	A	B	C	E	H
B-125	758	125	296	392	958
B-150	760	150	298	392	960
B-200	920	200	370	492	1150
B-250	1092	250	345	492	1400
B-300	1200	300	420	612	1593
B-350	1298	350	515	777	1686
B-400	1298	400	515	777	1686

單瓣式逆止閥 CHECK VALVE




MODEL	D	E	L	適用機型
CV-050	50	30	16	GT-050
CV-065	65	45	18	GT-065
CV-080	80	55	18	GT-080
CV-100	100	70	18	GT-100
CV-125	125	90	21	GT-125
CV-150	150	110	22	GT-150
CV-200	200	140	28	GT-200
CV-250	250	190	28	GT-250

雙瓣式逆止閥 DUAL CHECK VALVE



MODEL	A	L	適用機型
DCV-200	270	127	GT-200
DCV-250	332	146	GT-250
DCV-300	377	181	GT-300
DCV-350	420	184	GT-350
DCV-400	483	191	GT-400


充油式壓力錶 LIQUID FILLED PRESSURE GAUGE



MODEL	A	B	適用機型
AC-A	63	129	GT-050~400


壓力範圍 76~0cmHg, 0~1kg/cm²

管接頭 TUBE CONNECTOR




MODEL	A	B	C	L	適用機型
V-050	95	2"	50	40	GT-050
V-065	95	2.5"	65	40	GT-065
V-080	95	3"	80	40	GT-080
V-100	95	4"	100	40	GT-100
V-125	155	5"	125	50	GT-125
V-150	155	6"	150	50	GT-150
V-200	155	8"	200	60	GT-200
V-250	155	10"	250	60	GT-250
V-300	155	12"	300	60	GT-300
V-350	160	14"	350	70	GT-350
V-400	160	16"	400	70	GT-400

避震器 ABSORBER



MODEL	A	B	C	D	E	F	適用機型(Kg)
UJ-200J	140	110	64	55	3/8"	phi 14	0~150
UJ-500J	214	166	100	57	1/2"	phi 14	140~450
UJ-800J	268	220	130	82	1/2"	phi 17	400~750

避震墊 ABSORBER

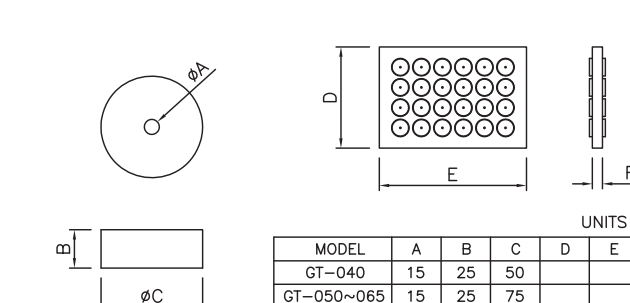

MODEL	A	B	C	D	E	F
GT-040	15	25	50			
GT-050~065	15	25	75			
GT-080~100	25	39	102			
GT-125~400				100	150	10